





KRYPTON

K2-IP

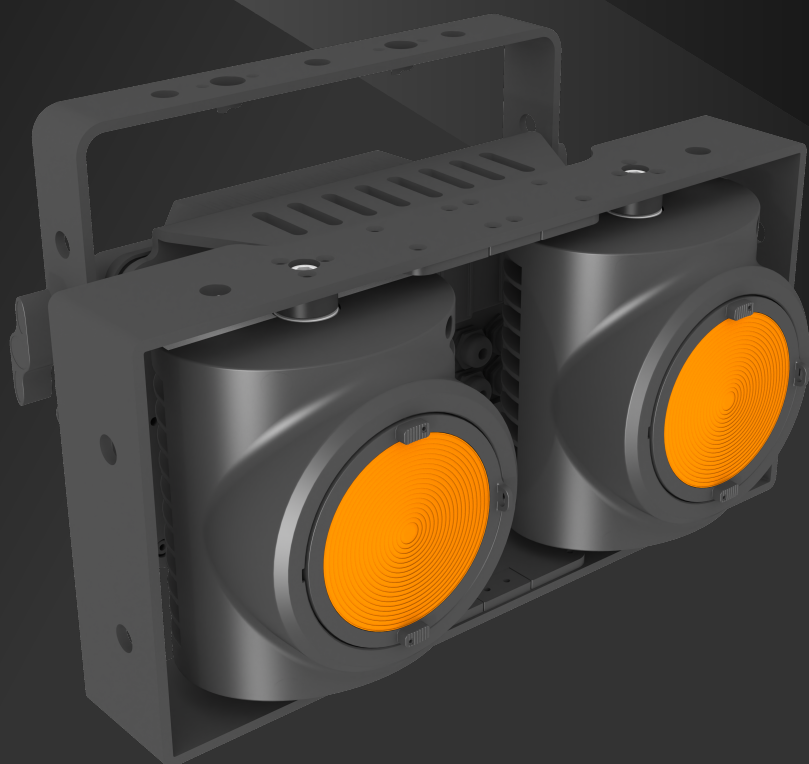

K2-IP



OPTIC

- LED: 2 × 175W LED (1800K ~ 3200K)
- Beam angle: 50° (With 15° optic lens)
- Field angle: 93°
- Lifetime: 50000 H

EFFECT

- 15 built in programs
- Strobe: 1 ~ 20Hz
- Dimming mode: 5 kinds
- Tungsten effect

CONTROL & PROGRAM

- Channel: 01/02/02-1/04/05/05-1/06/07/09CH
- Protocol: DMX512, RDM
- Data connector: 5PIN XLR
- Display: LCD Display

SOFTWARE

- Via DMX signal to update
- Static waterproof fan
- Intelligent speed control
- Intelligent temperature protection to ensure LED service life

POWER CONSUMPTION

- Voltage: AC 110V ~ 240V 50/60Hz
- Rated power: 320 W

SIZE & WEIGHT


- Size: 400 × 254 × 245 mm
- N.W: 8 kgs

HOUSING

- Die-cast aluminum structure
- Waterproof fan for heat dissipation

OTHER

- IP rating: IP65
- Work environment: -40°C ~ 45°C
- Startup environment: -20°C ~ 45°C

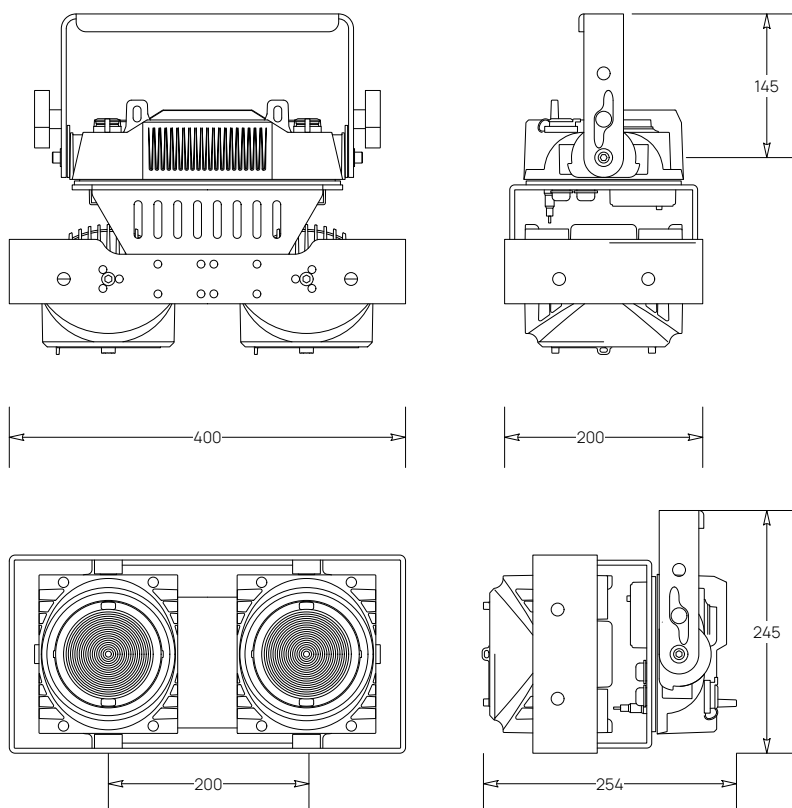

Menu	Display	Value	Description
DMX Address	001	001-...	Sets DMX Address
DMX Mode	01CH	01CH	Channel 1 Mode
		02CH	Channel 2 Mode
		02CH1	Channel 2 Mode, Instance 3
		04CH	Channel 4 Mode
		05CH	Channel 5 Mode
		05CH1	Channel 5 Mode, instance 3
		06CH	Channel 6 Mode
		07CH	Channel 7 Mode
		09CH	Channel 9 Mode, Instance 3
Slave Mode			Sets unit to Slave Mode
Static	Dim 255	Dim 000-255	Default 255
		Flash 000-255	Default 255
		WW 000-255	Default 255
		Amber 000-255	Default 255
Fading Speed	00	Speed 00	Speed 00-99
		Flash 000	Flash 000-255
Dimmer	Standard	Standard	Dimmer Mode Standard
		Stage	Dimmer Mode Stage
		TV	Dimmer Mode TV
		Architectural	Dimmer Mode Architectural
		Theatre	Dimmer Mode Theatre
White Balance	WW1:255	050-255	WW1:050-255
	A1:255	050-255	A1:050-255
	WW2:255	050-255	WW2:050-255
	A2:255	050-255	A2:050-255
No DMX	Hold	Hold/Black	Sets to Hold Value or Blackout
Auto Lock	Off	Off/On/On1	The screensaver will be locked immediately after long pressing the mode button for 2S in any interface When set to ON the screen will be locked immediately after power-on When Set to ON Press MODE for 3 seconds to unlock When set to ON1 Press UP, DOWN, UP, DOWN, ENTER to unlock. When set to OFF It will not be locked after power-on but after pressing the mode key for 2S the unlocking is the same as ON.



KRYPTON

KRYPTON K2-IP

User Menu

Menu	Display	Value	Description
Temperature Unit	F	F/°C	Sets display to Fahrenheit or Celcius
System Temp	L1 xxx°C	L1 xxx°C	Displays Led 1 Temperature
		L2 xxx°C	Displays Led 2 Temperature
Fan Set	High	High/Silent	Set fan speed
Default	Off	Off/On	Factory reset



KRYPTON

KRYPTON K2-IP

DMX Channels

01CH	02CH	02CH1	04CH	05CH	05CH1	06CH	07CH	09CH	Value	Description
	1		1	1		1	1		000-255	Warm White - All Pixels
	2		2	2		2	2		000-255	Amber - All Pixels
					1			1	000-255	Warm White - Pixels 1
					2			2	000-255	Amber - Pixel 1
					3			3	000-255	Warm White - Pixel 2
					4			4	000-255	Amber - Pixel 2
1					5			5	000-255	Dimmer
	1								000-255	Dimmer - Pixel 1
	2								000-255	Dimmer - Pixel 2
						3	4	6		Strobe
									000-031	LEDs OFF
									032-063	LEDs ON
									064-095	Strobe Slow > Fast
									096-127	LEDs ON
									128-159	Pulse Slow > Fast
									160-191	LEDs ON
									192-223	Random Slow > Fast
									224-255	LEDs ON
		3	3		4	5	7		000-255	Master Dimmer
		4	4		5	6	8		000-255	Master Dimmer Fine
			5		6	7	9			Dimmer Curve
									000-020	Standard
									021-040	Stage
									041-060	TV
									061-080	Architectural
									081-100	Theatre
									101-255	Default to unit setting