



EMC TEST REPORT

For

MEDIAPRO INTERNATIONAL LLC

Stage luminaire

Test Model: Krypton P600

Additional Models : please refer to model list

Prepared for : MEDIAPRO INTERNATIONAL LLC
Address : P.O.Box 114657 | Dubai | United Arab Emirates

Prepared by : Shenzhen Southern LCS Compliance Testing Laboratory Ltd.
Address : 101-201, No.39 Building, Xialang Industrial Zone, Heshuikou Community, Matian Street, Guangming District, Shenzhen, China

Tel : (+86)755-29871520
Fax : (+86)755-29871521
Web : www.LCS-cert.com
Mail : webmaster@LCS-cert.com

Date of receipt of test sample : June 12, 2023
Number of tested samples : 1
Serial number : Prototype
Date of Test : June 12, 2023 - June 29, 2023
Date of Report : June 29, 2023



**EMC TEST REPORT****EN IEC 55015:2019+A11:2020**

Emission - Electrical lighting and similar equipment

EN 61547:2009

Equipment for general lighting purposes - EMC immunity requirements

Report Number..... : LCSB061223015E

Date of Issue..... : June 29, 2023

Testing Laboratory Name..... : Shenzhen Southern LCS Compliance Testing Laboratory Ltd.

Address..... : 101-201, No.39 Building,Xialang Industrial Zone, Heshuikou Community, Matian Street,Guangming District, Shenzhen, China.

Testing Procedure..... : Full application of Harmonised standards ☒
Partial application of Harmonised standards ☐
Other standard testing method ☐**Applicant's Name..... : MEDIAPRO INTERNATIONAL LLC**

Address..... : P.O.Box 114657 | Dubai | United Arab Emirates

Test Specification:Standard..... : EN IEC 55015:2019+A11:2020
EN IEC 61000-3-2:2019+A1:2021
EN 61000-3-3:2013+A1:2019+A2:2021
EN 61547:2009

Test Report Form No..... : SLCSEMC-2.3

TRF Originator..... : Shenzhen Southern LCS Compliance Testing Laboratory Ltd.

Master TRF..... : Dated 2016-08

Shenzhen Southern LCS Compliance Testing Laboratory Ltd. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen Southern LCS Compliance Testing Laboratory Ltd. is acknowledged as copyright owner and source of the material. Shenzhen Southern LCS Compliance Testing Laboratory Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Equipment Under Test..... : Stage luminaire

Trademark..... : KRYPTON

Test Model/Type..... : Krypton P600

Rating..... : 100-240V~, 50/60Hz, 800W, IP20, ta45°C

Results : PASS**Compiled by:**

Amy Liu / Engineer

Supervised by:

Kris Mai / Technique Director

Approved by:

Dm Gu / Manager



Shenzhen Southern LCS Compliance Testing Laboratory Ltd.

101-201, No. 39 Building, Xialang Industrial Zone, Heshuikou Community, Matian Street, Guangming District, Shenzhen, China.

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com.

Scan code to check authenticity.



EMC - TEST REPORT

Test Report No.....: LCSB061223015E

Applicant.....: MEDIAPRO INTERNATIONAL LLC
Address.....: P.O.Box 114657 | Dubai | United Arab Emirates
Telephone.....: /
Fax.....: /

Manufacturer.....: MEDIAPRO INTERNATIONAL LLC
Address.....: P.O.Box 114657 | Dubai | United Arab Emirates
Telephone.....: /
Fax.....: /

Factory.....: CKC Lighting Co., Ltd(Lite Angle Limited)
Address.....: Guan Keng Gongye Yuan, Building#A, 2nd Floor, Dashi, Panyu,
Guangzhou 510300, China
Telephone.....: /
Fax.....: /

The applicant and manufacturer information, product name, model, trademark and other information in this report are all provided by the applicant, and this laboratory is not responsible for verifying its authenticity.

The test report merely corresponds to the test sample.

It is not permitted to copy extracts of these test result without the written permission of the test laboratory.



Shenzhen Southern LCS Compliance Testing Laboratory Ltd.

101-201, No. 39 Building, Xialang Industrial Zone, Heshuikou Community, Matian Street, Guangming District, Shenzhen, China.

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com.

Scan code to check authenticity.



ENVIRONMENTAL CONDITIONS

The climatic conditions during the test are within the limits specified by the manufacturer for the operation of the EUT and the test equipment. the climatic conditions during the test were in the following Limits:

Ambient temperature	15°C - 30°C
Relative Humidity air	30% - 60%
Atmospheric pressure	86 kPa - 106 kPa

Climate values will be recorded and recorded separately if specifically required in the base standard or application product/product series standard.

POSSIBLE TEST CASE VERDICTS

Test cases does not apply to test object	N/A
Test object does meet requirement	P(Pass) / PASS
Test object does not meet requirement	F(Fail) / FAIL
Not measured	N/M

DEFINITION OF SYMBOLS USED IN THIS TEST REPORT

☒ Indicate that the conditions, standards or equipment listed is applicable to this report / test / EUT.
☐ Indicate that the conditions, standards or equipment listed is not applicable to this report / test / EUT.

REVISION HISTORY

Revision	Issue Date	Revision Content	Revised by
000	June 29, 2023	Initial Issue	-

Remark:
000) : “---”





TABLE OF CONTENTS

1. GENERAL INFORMATION	6
1.1. General Description of The Item(s)	6
1.2. Operating Mode(s) Used of Tests	7
1.3. Support / Auxiliary Equipment for The EUT	7
1.4. Description of Test Facility	7
2. STATEMENT OF THE MEASUREMENT UNCERTAINTY	8
3. MEASURING DEVICES AND TEST EQUIPMENT	9
4. VERDICT SUMMARY SECTION	11
4.1. Standard(s)	11
4.2. Overview of Results	12
5. EMISSION TESTS	13
5.1. Conducted Disturbance	13
5.2. Radiated Disturbance (9KHz - 30MHz)	15
5.3. Radiated Disturbance (30MHz - 1GHz)	16
5.4. Harmonic Current	17
5.5. Voltage Fluctuations & Flicker	18
6. IMMUNITY TESTS	19
6.1. Performance Criteria	19
6.2. Electrostatic Discharge	20
6.3. Radio-Frequency Electromagnetic Fields	21
6.4. Electrical Fast Transient / Burst	22
6.5. Injected Currents (Radio-Frequency Common Mode)	23
6.6. Surge	24
6.7. Voltage Dips and Short Interruptions	25
ANNEX A - TEST RESULTS	26
ANNEX B - TEST PHOTOS	43
ANNEX C - EXTERNAL AND INTERNAL PHOTOS OF THE EUT	48





1. GENERAL INFORMATION

1.1. GENERAL DESCRIPTION OF THE ITEM(S)

Equipment Under Test	Stage luminaire
Test Model/Type	Krypton P600
Additional Models/Type	See Model list
Description of Model difference	See Model list
Rating	See Model list

General product information:

Declared by applicant as follows:

- All models of drives use the same circuit and PCB layout.
- All models have similar appearance and structure except power.
- This report after information review and verification, the model(s) "Krypton P600" were chosen as the representative model to perform all the tests.

Model List:

Model	Rating
Krypton S400	100-240V~, 50/60Hz, 530W, IP20, ta45°C
Krypton P600	100-240V~, 50/60Hz, 800W, IP20, ta45°C





1.2. OPERATING MODE(S) USED OF TESTS

During the tests, the following operating mode(s) has(have) been used.

Operating Mode	Operating Mode description	Used for testing	
		Emission	Immunity
1	Lighting on mode	☒	☒
2	Maximum light	☐	☐
3	Minimum light	☐	☐
4	Full load	☐	☐

1.3. SUPPORT / AUXILIARY EQUIPMENT FOR THE EUT

EUT has been tested using the following auxiliary equipment :

Auxeq	Model/Type	Manufacturer	Supplied by
--			

1.4. DESCRIPTION OF TEST FACILITY

Test Location	Shenzhen Southern LCS Compliance Testing Laboratory Ltd. 101-201, No.39 Building,Xialang Industrial Zone, Heshuikou Community, Matian Street, Guangming District, Shenzhen, China. CNAS Registration Number is L10160.
Date of receipt of test item	June 12, 2023
Date(s) of performance of test	June 12, 2023 - June 29, 2023





2. STATEMENT OF THE MEASUREMENT UNCERTAINTY

The data and results referenced in this document are true and accurate. the reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. the measurement uncertainty was calculated for all measurements listed in this test report acc. to CISPR 16 - 4 "Specification for radio disturbance and immunity measuring apparatus and methods - Part 4: Uncertainty in EMC Measurements" and is documented in the LCS quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. the manufacturer has the sole responsibility of continued compliance of the device.

Measurement	Uncertainty (U_{lab})
Conducted disturbance (9kHz - 30MHz)	± 2.80 dB
Magnetic field disturbance (9kHz - 30MHz)	± 3.46 dB
Radiated disturbance (30MHz - 200MHz)	± 4.66 dB
Radiated disturbance (200MHz - 1GHz)	± 4.64 dB

Supplementary information:

The reported expanded uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor of $k=2$, which for a normal distribution corresponds to a coverage probability of approximately 95%.





3. MEASURING DEVICES AND TEST EQUIPMENT

CONDUCTED DISTURBANCE						
Item	Test equipment	Manufacturer	Model No.	Serial No.	Cal Date	Due Date
1	No. 1 shielded Room	CHENGYU	843	/	2023-04-26	2026-04-25
2	EMI Test Receiver	R&S	ESCI	101142	2023-04-26	2024-04-25
3	10dB Attenuator	SCHWARZBECK	VTSD9561-F	9561-F159	2023-04-26	2024-04-25
4	Artificial Mains Network	SCHWARZBECK	NSLK8127	8127716	2023-04-26	2024-04-25
5	Impedance Stabilization Network	SCHWARZBECK	NTFM 8158	NTFM8158#120	2023-04-26	2024-04-25
6	Voltage Probe	SCHWARZBECK	KT 9420	9420401	2023-04-26	2024-04-25
7	EMI Test Software	EZ	EZ_EMC	N/A	/	/

RADIATED DISTURBANCE (9KHz - 30MHz)						
Item	Test equipment	Manufacturer	Model No.	Serial No.	Cal Date	Due Date
1	No. 1 shielded Room	CHENGYU	843	/	2023-04-26	2026-04-25
2	EMI Test Receiver	R&S	ESCI	101142	2023-04-26	2024-04-25
3	10dB Attenuator	SCHWARZBECK	VTSD9561-F	9561-F159	2023-04-26	2024-04-25
4	Triple-loop Antenna	EVERFINE	LLA-2	11050003	2023-04-26	2024-04-25
5	EMI Test Software	EZ	EZ_EMC	N/A	/	/

RADIATED DISTURBANCE (above 30MHz)						
Item	Test equipment	Manufacturer	Model No.	Serial No.	Cal Date	Due Date
1	3m Semi Anechoic Chamber	SIDT FRANKONIA	SAC-3M	03CH03-HY	2021-05-28	2024-05-29
2	EMI Test Receiver	R&S	ESCI3	101010	2023-04-26	2024-04-25
3	Log-periodic Antenna	SCHWARZBECK	VULB9163	5094	2022-05-08	2025-05-07
4	Coupling Decoupling Network	SCHWARZBECK	CDNE M2	00251	2023-04-26	2024-04-25
5	Coupling Decoupling Network	SCHWARZBECK	CDNE M3	00248	2023-04-26	2024-04-25
6	EMI Test Software	EZ	EZ_EMC	N/A	/	/
7	Controller system	SKET	SKC1000	N/A	/	/

HARMONIC CURRENT & FLICKER						
Item	Test equipment	Manufacturer	Model No.	Serial No.	Cal Date	Due Date
1	Harmonic Current and Flicker Test System	HTEC	AC2000A	/	2023-04-26	2024-04-25
2	Linear variable frequency power supply	HTEC	HHF-5010	/	2023-04-26	2024-04-25

ELECTROSTATIC DISCHARGE						
Item	Test equipment	Manufacturer	Model No.	Serial No.	Cal Date	Due Date
1	ESD Simulator	TESEQ	NSG 437	1615	2023-03-20	2024-03-19

ELECTRICAL FAST TRANSIENT / BURST						
Item	Test equipment	Manufacturer	Model No.	Serial No.	Cal Date	Due Date



Shenzhen Southern LCS Compliance Testing Laboratory Ltd.

101-201, No. 39 Building, Xialang Industrial Zone, Heshuikou Community, Matian Street, Guangming District, Shenzhen, China.

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com.

Scan code to check authenticity.



1	Electrical Fast Transient Generator	HTEC	HEFT51	162201	2023-04-26	2024-04-25
2	EFT Coupling Clamp	HTEC	H3C	163701	2023-04-26	2024-04-25

SURGE

Item	Test equipment	Manufacturer	Model No.	Serial No.	Cal Date	Due Date
1	Surge Generator	3CTEST	SG5006G	EC5581070	2023-04-26	2024-04-25
2	Coupling / Decoupling network	3CTEST	SGN-5010G	EC5591033	2023-04-26	2024-04-25

INJECTED CURRENTS (RADIO-FREQUENCY COMMON MODE)

Item	Test equipment	Manufacturer	Model No.	Serial No.	Cal Date	Due Date
1	No. 2 shielded room	CHENGYU	743	/	2023-04-26	2026-04-25
2	Conducted Susceptibility Generator	HTEC	CDG6000	126A140012016	2023-04-26	2024-04-25
3	CDN	HTEC	CDN-M2+M3	A22/0382/2016	2023-04-26	2024-04-25
4	6dB attenuator	HTEC	ATT6	HA1601	2023-04-26	2024-04-25
5	Electromagnetic clamp	LUTHI	EM101	35535	2023-04-26	2024-04-25

POWER FREQUENCY MAGNETIC FIELD

Item	Test equipment	Manufacturer	Model No.	Serial No.	Cal Date	Due Date
1	Power Frequency Mag-Field Generator System	HTEC	HPFMF100	100-2400	2023-04-26	2024-04-25

VOLTAGE DIPS AND SHORT INTERRUPTIONS

Item	Test equipment	Manufacturer	Model No.	Serial No.	Cal Date	Due Date
1	Voltage Dips and up Generator	HTEC	HPFS161P	162202	2023-04-26	2024-04-25

RADIO-FREQUENCY ELECTROMAGNETIC FIELDS

Item	Test equipment	Manufacturer	Model No.	Serial No.	Cal Date	Due Date
1	3m Semi Anechoic Chamber	SIDT FRANKONIA	SAC-3M	03CH03-HY	2023-03-02	2026-03-01
2	RF signal generator	Agilent	8648B	3847M00804	2023-03-02	2024-03-01
3	Power amplifier	SKET	LPA 0810-150	202302457	2023-03-02	2024-03-01
4	Field generating antenna	SKET	STLP 9129 Plus	/	/	/
5	Power probe	R&S	NRP-Z11	115232	2023-03-02	2024-03-01
6	Power probe	R&S	NRP-Z11	117755	2023-03-02	2024-03-01
7	Test Software	SKET	EMC-S	N/A	/	/



Shenzhen Southern LCS Compliance Testing Laboratory Ltd.

101-201, No. 39 Building, Xialang Industrial Zone, Heshuikou Community, Matian Street, Guangming District, Shenzhen, China.

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com.

Scan code to check authenticity.



4. VERDICT SUMMARY SECTION

This chapter present an overview of the standards and results. Refer the next chapter for details of measured test results and applied test levels.

4.1. STANDARD(S)

EN IEC 55015:2019+A11:2020 - Limits and methods of measurement of radio disturbance characteristics of electrical lighting and similar equipment.

EN 61547:2009 - Equipment for general lighting purposes — EMC immunity requirements.

EN IEC 61000-3-2:2019+A1:2021 - Electromagnetic compatibility (EMC) Part 3-2: Limits for harmonic current emissions (equipment input current ≤ 16 A per phase).

EN 61000-3-3:2013+A1:2019+A2:2021 - Electromagnetic compatibility (EMC) Part 3-3: Limits for voltage changes, voltage fluctuations and flicker in public low-voltage supply systems, for equipment with rated current ≤ 16 A per phase and not subject to conditional connection.





4.2. OVERVIEW OF RESULTS

EMISSION TESTS - EN IEC 55015, EN IEC 61000-3-2, EN 61000-3-3		
Requirement - Test case	Limit	Verdict
Conducted Disturbance - electric power supply	Table 1, Table 4	PASS
Conducted Disturbance - wired network ports at other than power supply	Table 2, Table 3	N/A
Conducted Disturbance - local wired ports at other than electrical power supply interface of ELV lamp	Table 5, Table 6	N/A
Assessment of the enclosure port	---	---
Radiated Disturbance in the frequency range 9 kHz to 30 MHz	Table 8, Table 9	PASS
Radiated Disturbance in the frequency range 30 MHz to 1 GHz	Table 10	PASS
Harmonic Current	Clause 7	PASS
Voltage Fluctuations and Flicker ²	Clause 5	PASS
IMMUNITY TESTS - EN IEC 61547		
Requirement - Test case	Basic Standard(s)	Verdict
Electrostatic Discharge	IEC/EN 61000-4-2	PASS
Radio-Frequency Electromagnetic Fields	IEC/EN 61000-4-3	PASS
Electrical Fast Transient / Burst	IEC/EN 61000-4-4	PASS
Surge	IEC/EN 61000-4-5	PASS
Injected Currents (Radio-Frequency Common Mode)	IEC/EN 61000-4-6	PASS
Power Frequency Magnetic Field ¹	IEC/EN 61000-4-8	N/A
Voltage Dips and Short Interruptions	IEC/EN 61000-4-11	PASS

Supplementary information:

- 1) Only need to be applied to equipment containing components susceptible to magnetic fields.
- 2) According to EN 61000-3-3:2013+A1:2019+A2:2021 Clause A.2, Incandescent lamp luminaires with ratings less than or equal to 1000W and discharge and LED lamp luminaires with ratings less than or equal to 600W, are deemed to comply with the standard and are not required to be tested.





5. EMISSION TESTS

5.1. CONDUCTED DISTURBANCE

Standard	EN IEC 55015:2019+A11:2020
Basic Standard(s)	CISPR 16-2-1

Disturbance voltage limits at the electric power supply interface

Frequency range [MHz]	Limit: Quasi-peak [dB(μV)]	Limit: Average[dB(μV)]	IF BW
0,009 - 0,05	110	N/A	200 Hz
0,05 - 0,15	90 - 80	N/A	200 Hz
0,15 - 0,5	66 - 56	56 - 46	9 kHz
0,5 - 5,0	56	46	9 kHz
5,0 - 30	60	50	9 kHz

- 1) At the transition frequency, the lower limit applies.
- 2) The limit decreases linearly with the logarithm of the frequency in the ranges 50 kHz to 150 kHz and 150 kHz to 0,5 MHz.
- 3) If the EUT is non-restricted ELV lamps, the limits add 26dB.

Disturbance voltage limits at wired network interfaces other than power supply

Frequency range [MHz]	Limit: Quasi-peak [dB(μV)]	Limit: Average[dB(μV)]	IF BW
0,15 - 5,0	84 - 74	74 - 64	9 kHz
5,0 - 30	74	64	9 kHz

- 1) The limits decrease linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.
- 2) The disturbance voltage limits are derived for use with an artificial asymmetrical network (AAN) which presents a common mode (asymmetric mode) impedance of 150 Ω to the measured interface.

Disturbance current limits at wired network interfaces other than power supply

Frequency range [MHz]	Limit: Quasi-peak [dB(μA)]	Limit: Average[dB(μA)]	IF BW
0,15 - 5,0	40 - 30	30 - 20	9 kHz
5,0 - 30	30	20	9 kHz

- 1) The limits decrease linearly with the logarithm of the frequency in the range 0.15MHz to 0.5 MHz.


Disturbance voltage limits at local wired ports: local wired ports other than electrical power supply interface of ELV lamp

Frequency range [MHz]	Limit: Quasi-peak [dB(μV)]	Limit: Average[dB(μV)]	IF BW
0,15 - 5,0	80	70	9 kHz
5,0 - 30	74	64	9 kHz

- 1) At the transition frequency, the lower limit applies.



Test configuration

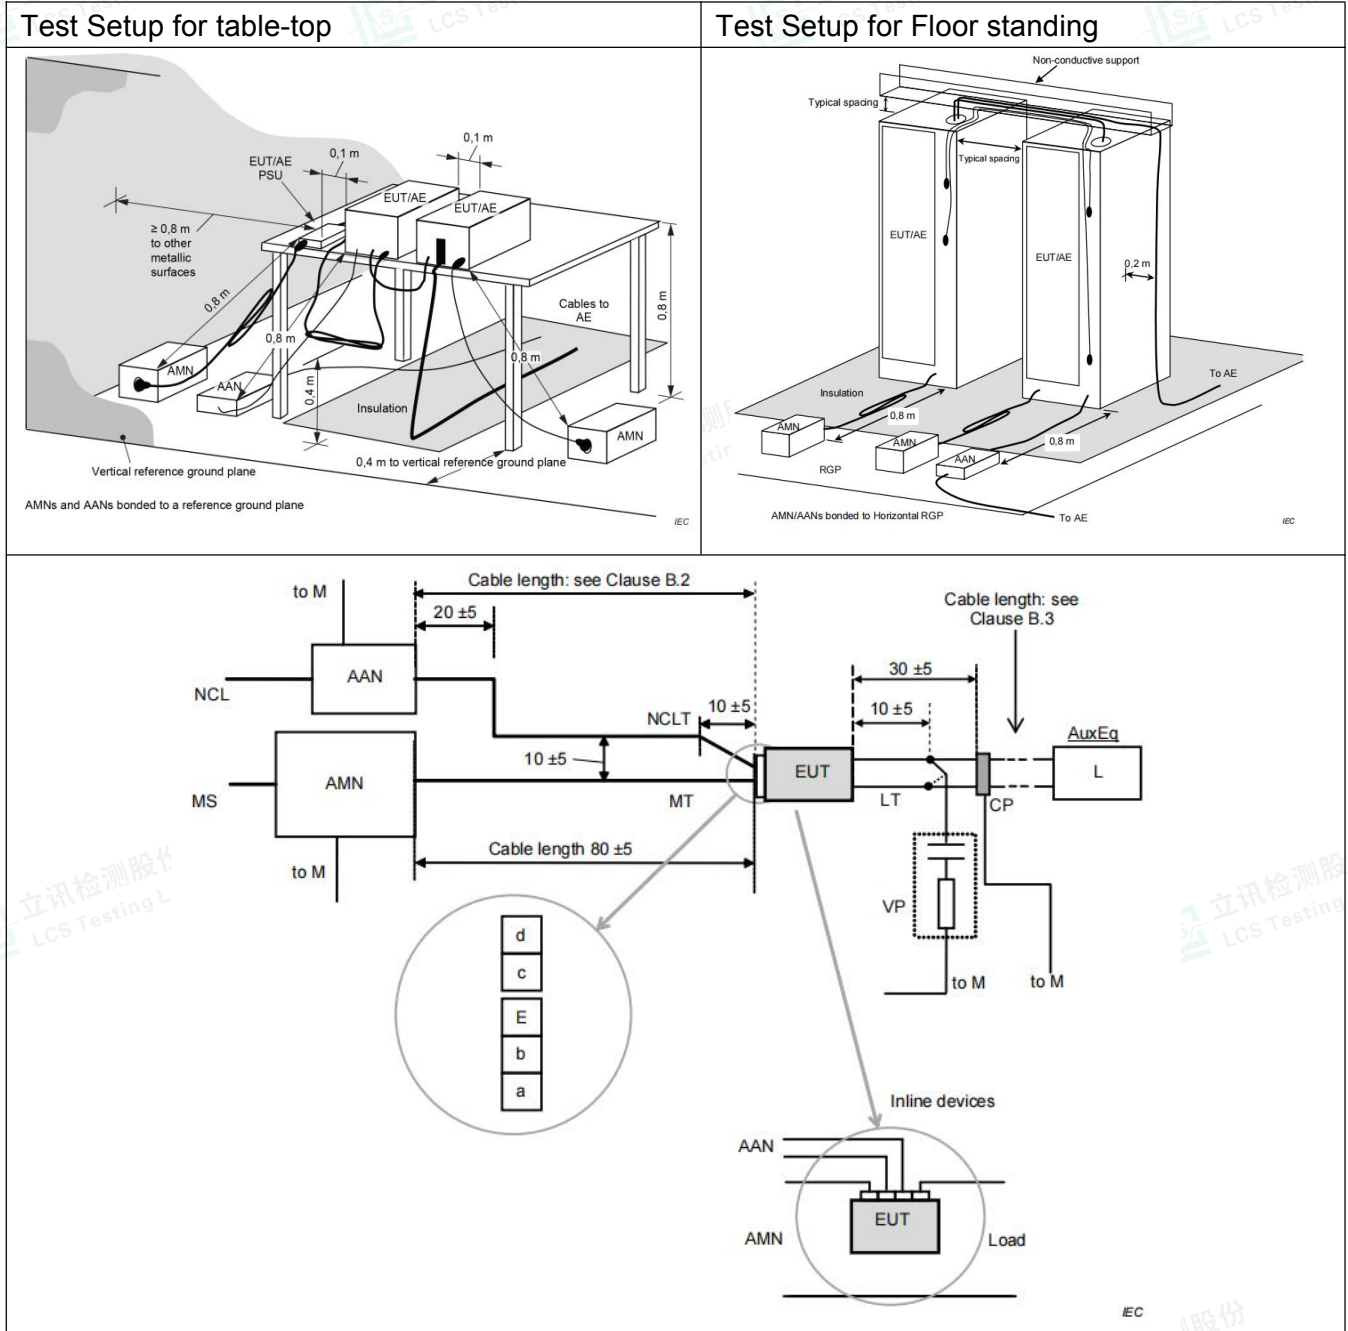

Test Procedure Description

For Table-top, EUT shall be placed at $(0,8 \pm 0,05)$ m above the reference plane of the test site selected for measurement. for Floor standing, EUT shall be placed at $(0,12 \pm 0,04)$ m above the reference plane of the test site selected for measurement.

and connected to the AC mains through artificial mains network (LISN). EUT is powered by V-type artificial power network, and the distance from LISN or ANN is 0,8m. the part of the EUT power cord exceeding 0,8m folds in parallel to form a 0,3-0,4 m eights harness.

Test Results refer to Annex A.1





5.2. RADIATED DISTURBANCE (9KHz - 30MHz)


Standard	EN IEC 55015:2019+A11:2020
Basic Standard(s)	CISPR 16-2-3
Test method	Large Loop Antenna (LLA)

LLAS Radiated disturbance limits (2m)

Frequency range [MHz]	Limit: Quasi-peak [dB(μA)]	IF BW
0,009 - 0,07	88	200 Hz
0,07 - 0,15	88 - 58	200 Hz
0,15 - 3,0	58 - 22	9 kHz
3,0 - 30	22	9 kHz

1) At the transition frequency the lower limit applies.
2) Decreasing linearly with logarithm of the frequency.

Test configuration

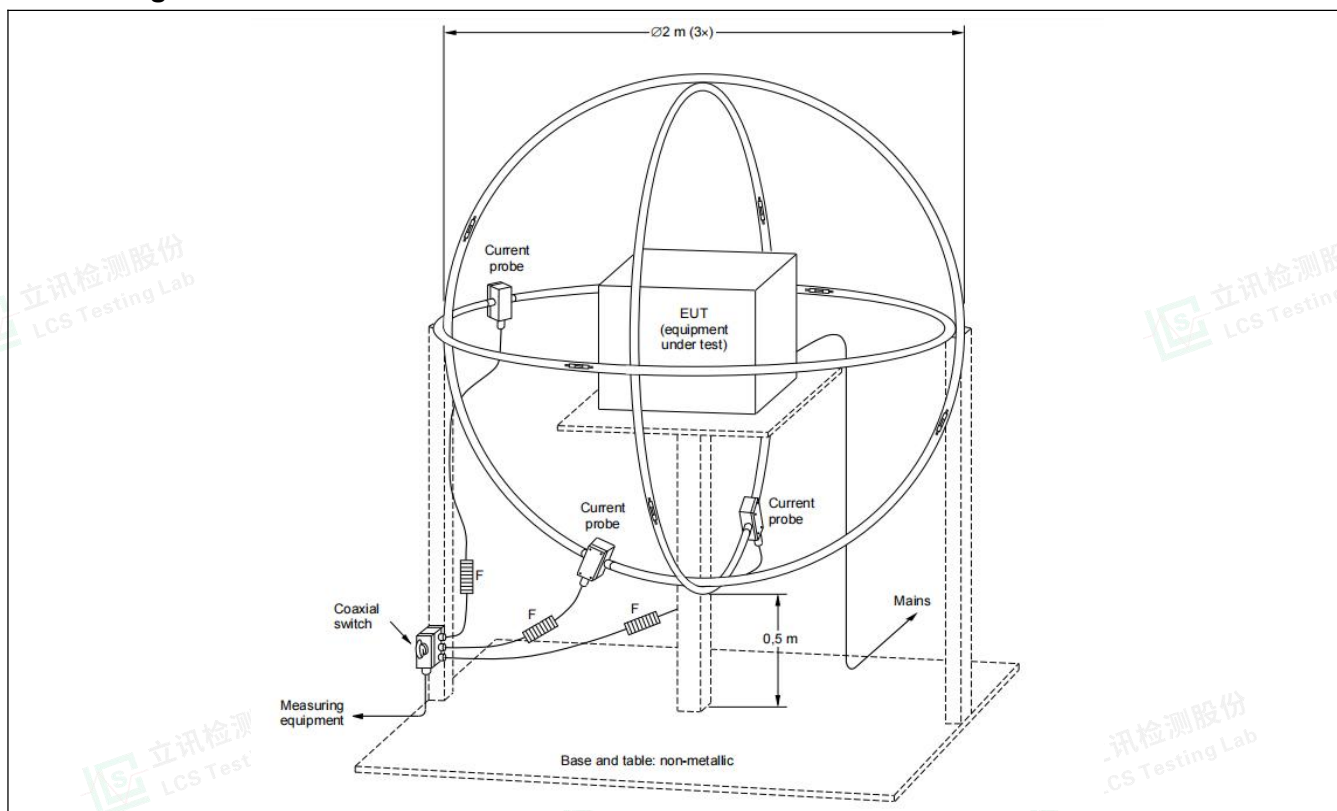

Test Procedure Description

The EUT is placed on a wood table in the center of a loop antenna. the induced current in the loop antenna is measured by means of a current probe and the test receiver. Three field components are checked by means of a coaxial switch.

Test Results refer to Annex A.2





5.3. RADIATED DISTURBANCE (30MHz - 1GHz)


Standard	EN IEC 55015:2019+A11:2020
Basic Standard(s)	CISPR 16-2-3
Test method	Semi Anechoic Chamber (SAC)

SAC Radiated disturbance limit

Frequency range [MHz]	Limit: Quasi-peak [dB(μV/m)]		IF BW
	3 m distance	10 m distance	
30 - 230	40	30	120 KHz
230 - 1000	47	37	120 KHz

- 1) At the transition frequency, the lower limit applies.
- 2) Distance refers to the distance in meters between the measuring instrument antenna geometric center and the closed point of any part of the EUT.

Test configuration

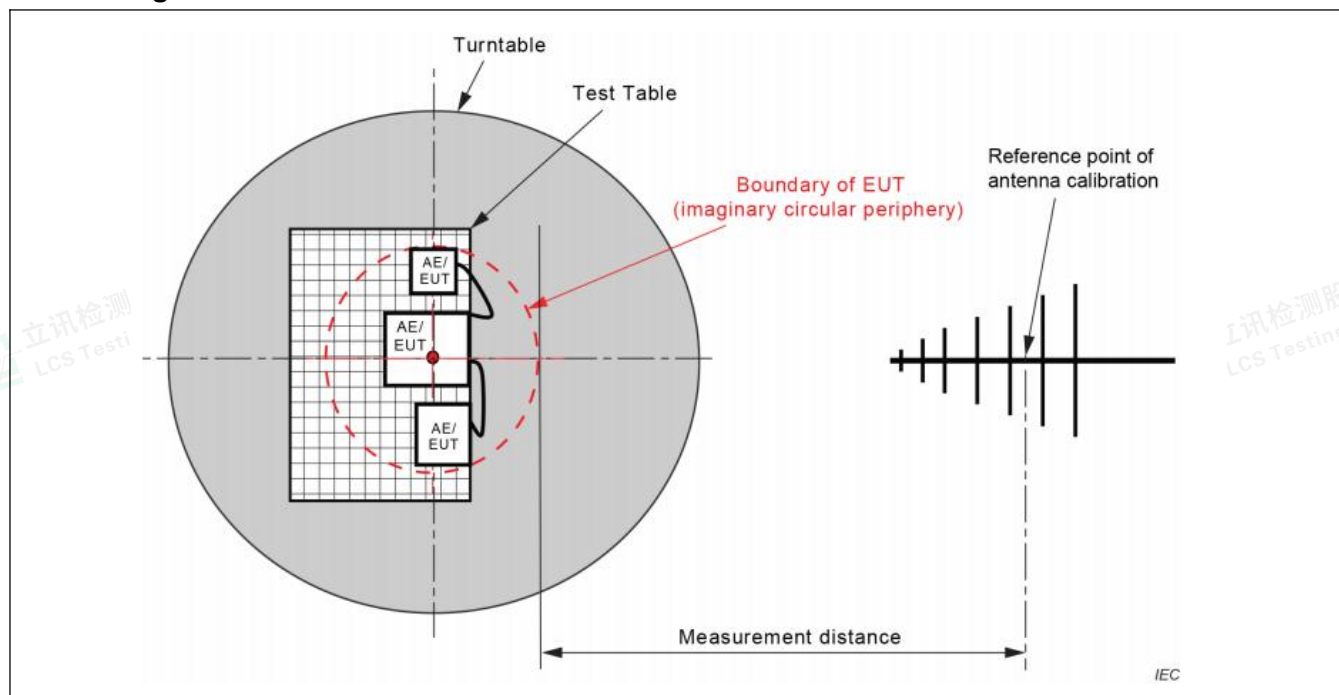

Test Procedure Description

The radiated disturbance test was conducted in a 3m Semi Anechoic Chamber and conforming to CISPR 16-2-3. the EUT is placed on a turntable, which is 0.8 meter high above the ground. the turntable can rotate 360 degrees to determine the position of the maximum emission level. the EUT is set 3 meters away from the receiving antenna, which is mounted on an antenna tower. the antenna can be moved up and down from 1 to 4 meters to find out the maximum emission level. Log-periodic Antenna (calibrated by Dipole antenna) is used as a receiving antenna. both horizontal and vertical polarization of the antenna is set on test.

Test Results refer to Annex A.3






5.4. HARMONIC CURRENT

Standard	EN IEC 61000-3-2:2019+A1:2021	
Exclusions (For these categories of equipment, limits are not specified in the EN IEC 61000-3-2)	☐	Systems with nominal voltages less than 220V _{AC} (line-to-neutral)
	☐	Lighting equipment with rated power < 5 W
	☐	Equipment with rated power of ≤ 75 W (other than lighting equipment)
	☐	Professional equipment with a total rated power >1kW
	☐	Symmetrically controlled heating elements with rated power ≤ 200 W
	☐	Independent dimmers for incandescent lamps with rated power ≤ 1kW

Classification		
☒	Class A	All equipment not specified as belonging to Class B, C or D
☐	Class B	Portable tools
☐	Class C	☐ Lighting equipment with active input power > 25W
		☐ Lighting equipment with active input power ≥ 5W and ≤ 25W
		☐ Table 3, column 2 (Power-related limits)
		☐ 3rd harmonic ≤ 86%, 5th harmonic ≤ 61% and waveform conditions
		☐ THD ≤ 70%, Harmonic:3rd ≤ 35%, 5th ≤ 25%, 7th ≤ 30%, 9th and 11th ≤ 20%, 2nd ≤ 5%
☐	Class D	Personal computers, television receivers, refrigerators and freezers having one or more variable-speed drives to control compressor

Test configuration

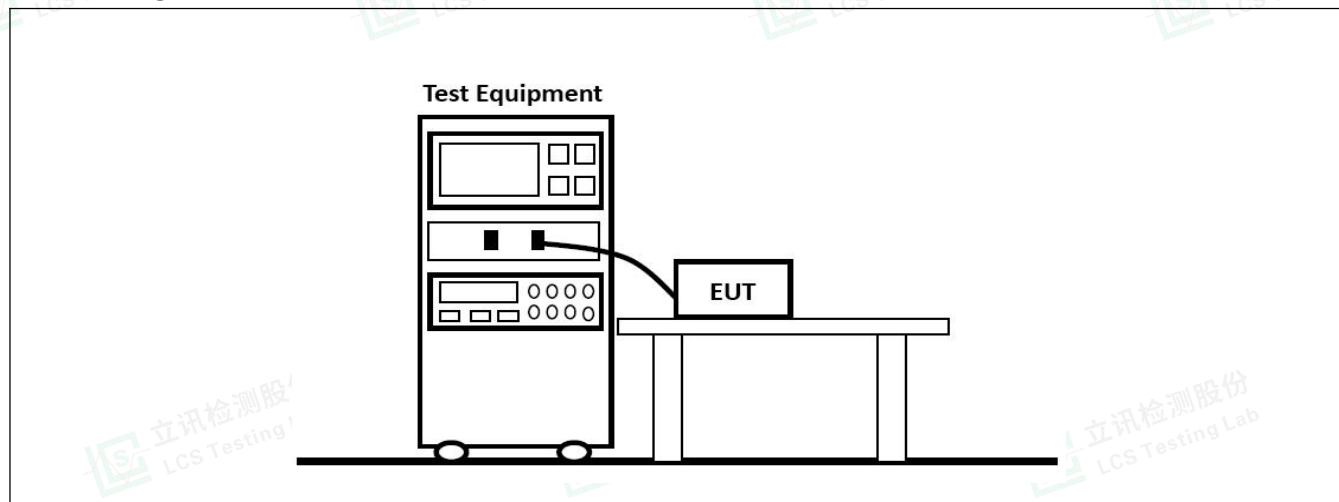

Test Results refer to Annex A.4






5.5. VOLTAGE FLUCTUATIONS & FLICKER

Standard	EN 61000-3-3:2013+A1:2019+A2:2021
----------	-----------------------------------

Limit

P _{st} (Short term flicker)	☒	≤ 1	☐	Not applicable
P _{lt} (Long-term flicker)	☒	≤ 0,65	☐	Not applicable
T _{max} (Accumulated time)	☒	≤ 500 ms	☐	Not applicable
d _c (Relative voltage change)	☒	≤ 3.3%	☐	Not applicable
d _{max} (Max.voltage change)	☒	≤ 4%	☐	≤ 6%
	☐	≤ 7%	☐	Not applicable

Test configuration

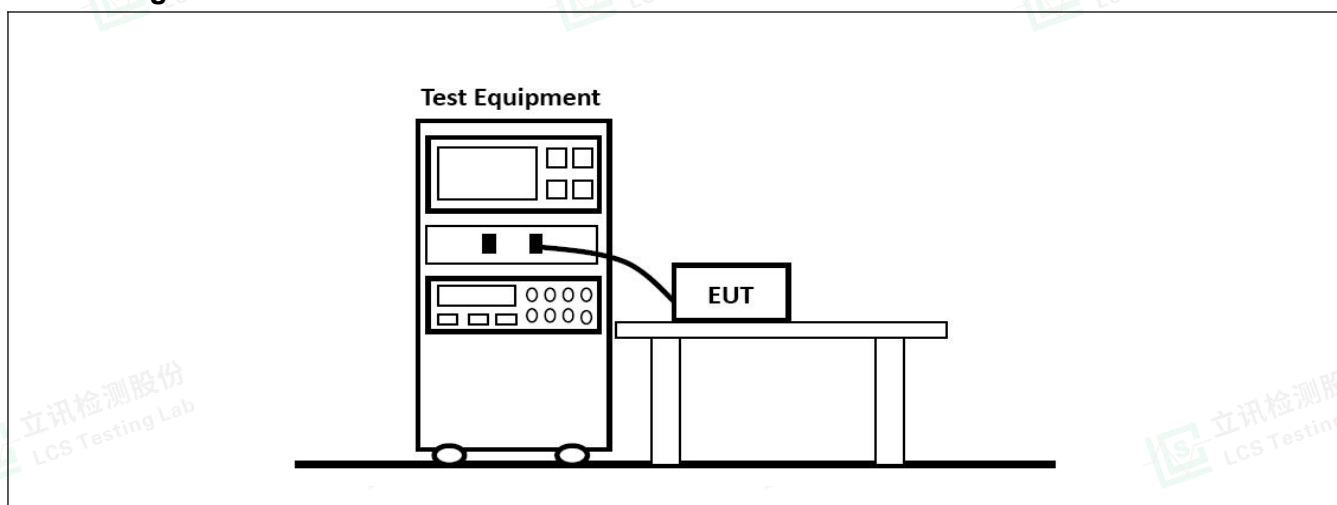

Test Results refer to Annex A.5





6. IMMUNITY TESTS

6.1. PERFORMANCE CRITERIA

Standard	EN 61547:2009
----------	---------------

For the various immunity tests that apply, the performance of the following functions shall be assessed, as far as applicable or specified by the manufacturer:

- the luminous intensity of the luminaire or of the light source(s);
- the control function, for example on/off switching, light level setting, colour adjustment, wireless control.

Performance criterion A: during the test, no change of the luminous intensity shall be observed and the regulating control, if any, shall operate during the test as intended.

Performance criterion B: during the test, the luminous intensity may change to any value. after the test, the luminous intensity shall be restored to its initial value within 1 min(30 min for high pressure gas discharge lamps) regulating controls need not function during the test, but after the test, the mode of the control shall be the same as before the test provided that during the test no mode changing commands were given.

Performance criterion C: during and after the test, any change of the luminous intensity is allowed and the lamp(s) may be extinguished. after the test, within 30 min, all functions shall return to normal, if necessary by temporary interruption of the mains supply and / or operating the regulating control.

Electronic lighting equipment		Tests and performance criteria							
		5.2 (ESD)	5.3 (RS)	5.4 (PFMF)	5.5 (EFT)	5.6 (CS)	5.7 (Surge)	5.8 (Dips)	5.8 (Interruption)
☐	Self-ballasted lamps	B	A	A	B	A	C	C	B
☒	Lighting equipment (excluding self-ballasted lamps) Module in host	B	A	A	B	A	C	C	B ¹
☐	Luminaire for emergency lighting	B ²	A	A	B ²	A	B ²	See ³	See ³

Supplementary information:

- 1) For ballasts where the lamp is not able to restart within 1 min, due to the physical constraints of the lamp, performance criterion C applies.
- 2) Luminaires for emergency lighting shall be tested in both the normal and emergency mode of operation.
- 3) These tests do not apply as they are covered by the test in IEC 60598-2-22.
- 4) For emergency luminaires designed to operate in high-risk task areas, after the test, the luminous intensity shall be restored to its initial value within 0,5 s.






6.2. ELECTROSTATIC DISCHARGE

Electrostatic discharge (ESD) is the result of accumulated static electricity from a person or object, for example, walking on a synthetic carpet. ESD can indirectly affect the operation of equipment or damage its electronic components through direct discharge or coupling. both effects were simulated during the test. contact discharge is the preferred test method. twenty discharges (10 with positive and 10 with negative polarity) shall be applied on each accessible metallic part of the enclosure (terminals are excluded). air discharges shall be used where contact discharges cannot be applied. discharges shall be applied on the horizontal or vertical coupling planes.

Requirements

Standard	EN 61547:2009							
Basic standard	EN 61000-4-2							
Port under test	Enclosure							
Contact discharge	☒	± 2 kV	☒	± 4 kV	☐	±8 kV	☐	±15 kV
Air discharge	☒	± 2 kV	☒	± 4 kV	☒	±8 kV	☐	±15 kV
Number of discharges	≥ 10 per polarity with ≥ 1 sec interval							

Test configuration

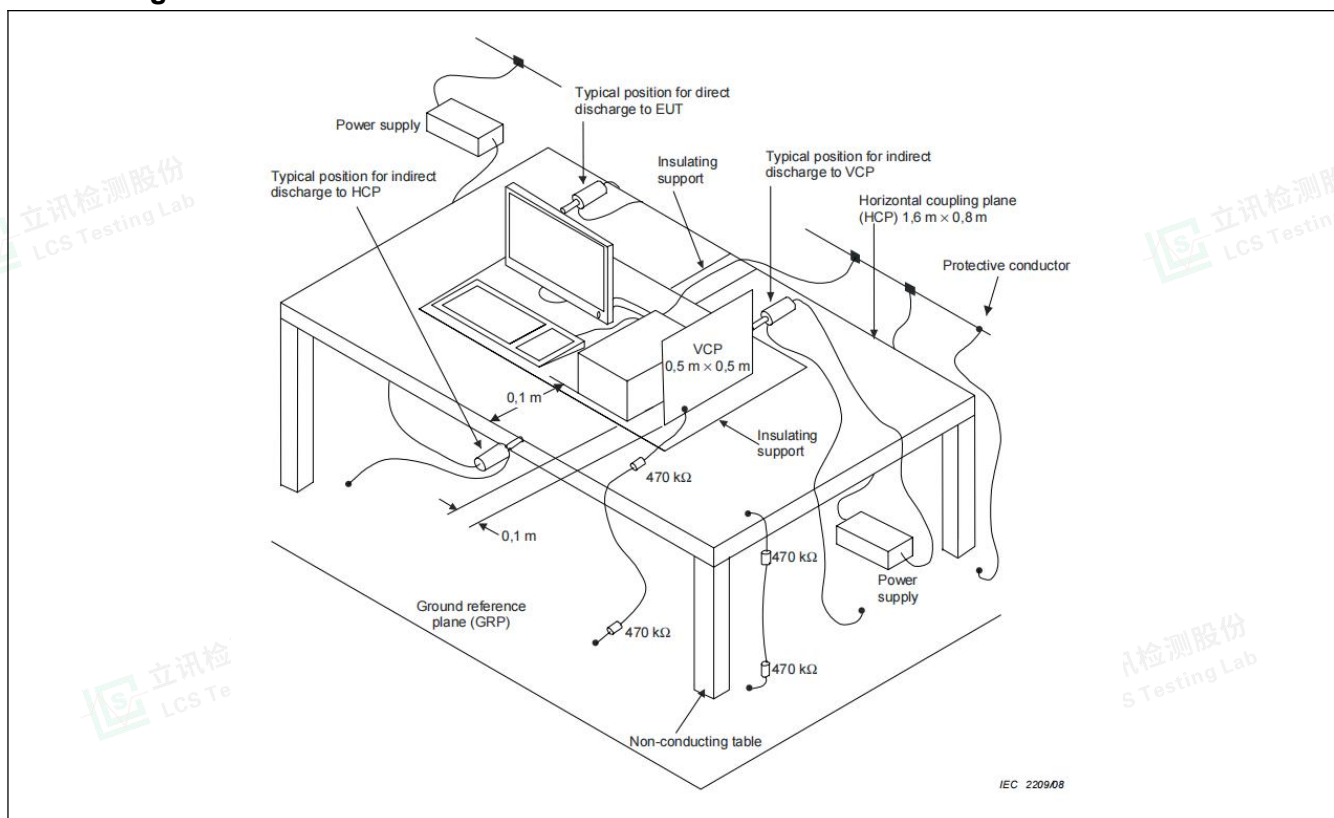

Test Results refer to Annex A.6





6.3. RADIO-FREQUENCY ELECTROMAGNETIC FIELDS

During the test it is verified if the EUT has sufficient immunity against radiated electromagnetic fields.


The test was carried out in a half-wave anechoic chamber with absorbent material attached to a reflective ground plate. Before the test, the test field strength needs to be calibrated. during the calibration, the corresponding relationship between the target field strength and the forward power applied to the transmitting antenna is established. during the test, except for EUT, the indoor layout is consistent with the calibration.

The EUT and its simulators are placed on a turn table which is 0,8 meter above ground. EUT is set 3 meter away from the transmitting antenna which is mounted on an antenna tower. both horizontal and vertical polarization of the antenna are set on test. each of the four sides of EUT must be faced this transmitting antenna and measured individually. in order to judge the EUT performance, a CCD camera is used to monitor EUT screen.

Requirements

Standard	EN 61547:2009			
Basic standard	EN 61000-4-3			
Port under test	Enclosure			
Frequency range	Test level	Modulation	Dwell time	Step size
80 - 1000 MHz	3 V/m	1 kHz, 80 % AM	≥ 0,5 s	≤ 1%

Test configuration

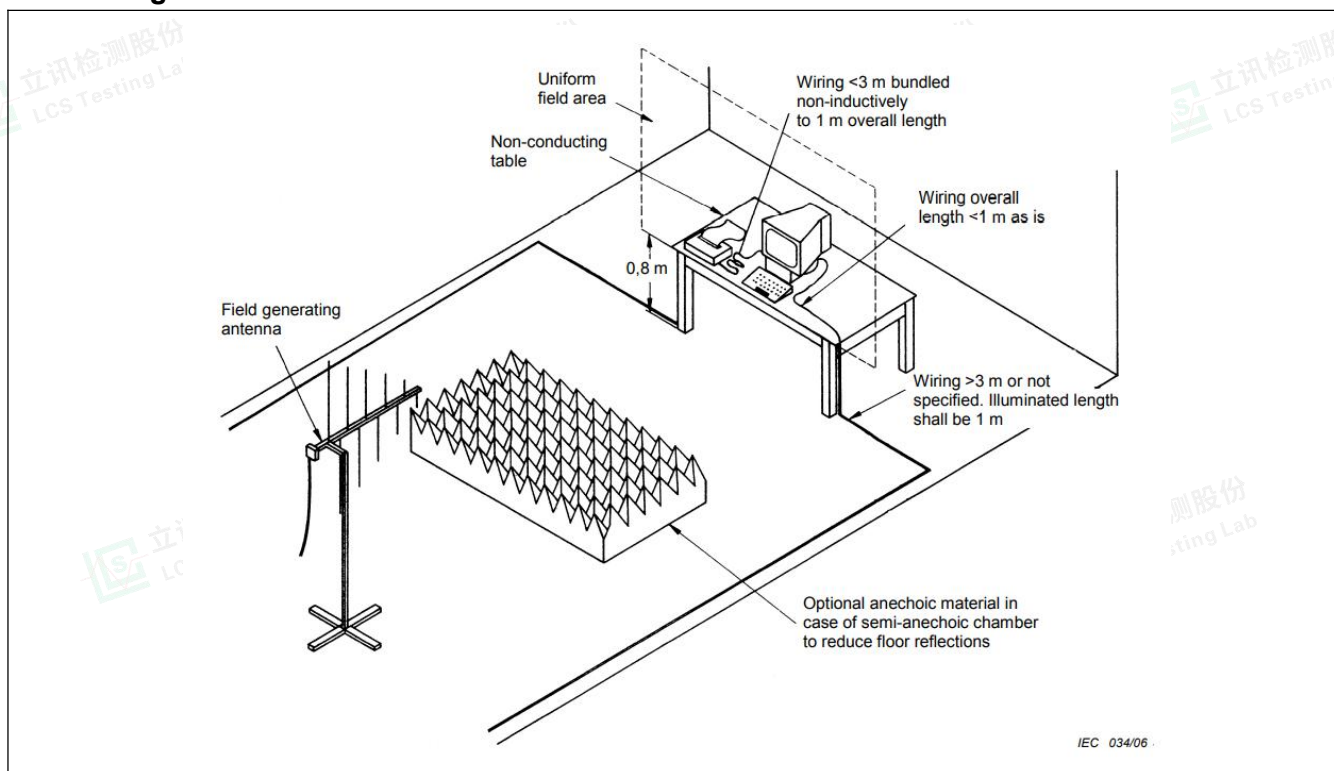

Test Results refer to Annex A.6



6.4. ELECTRICAL FAST TRANSIENT / BURST

The EFT immunity test simulates the disturbances by caused of very short transient bursts.


The EUT is put on the Insulating support which is 0.1 meter high above the ground reference plane. the minimum distance between EUT and all other conductive structure, except the ground plane beneath the EUT, shall be more than 0.5 m. both polarities of the test voltage should be applied during test, fast transients are carried out with a minimum duration of 2 min with a positive polarity and a minimum of 2 min with a negative polarity.

Requirements

Standard		EN 61547:2009		
Basic standard		EN 61000-4-4		
Pulse characteristics		5/50 ns		
Port under test		Test level	Repetition frequency	Duration
☒	AC input / output power	± 1000 V	5 kHz	2 min / polarity
☐	DC input / output power ²	± 500 V	5 kHz	2 min / polarity
☐	Signal / control lines and load ¹ ports	± 500 V	5 kHz	2 min / polarity

1) Only applicable to ports interfacing with cables whose whose total length may exceed 3 m.
2) Not applicable to equipment not connected to the mains while in use.

Test configuration

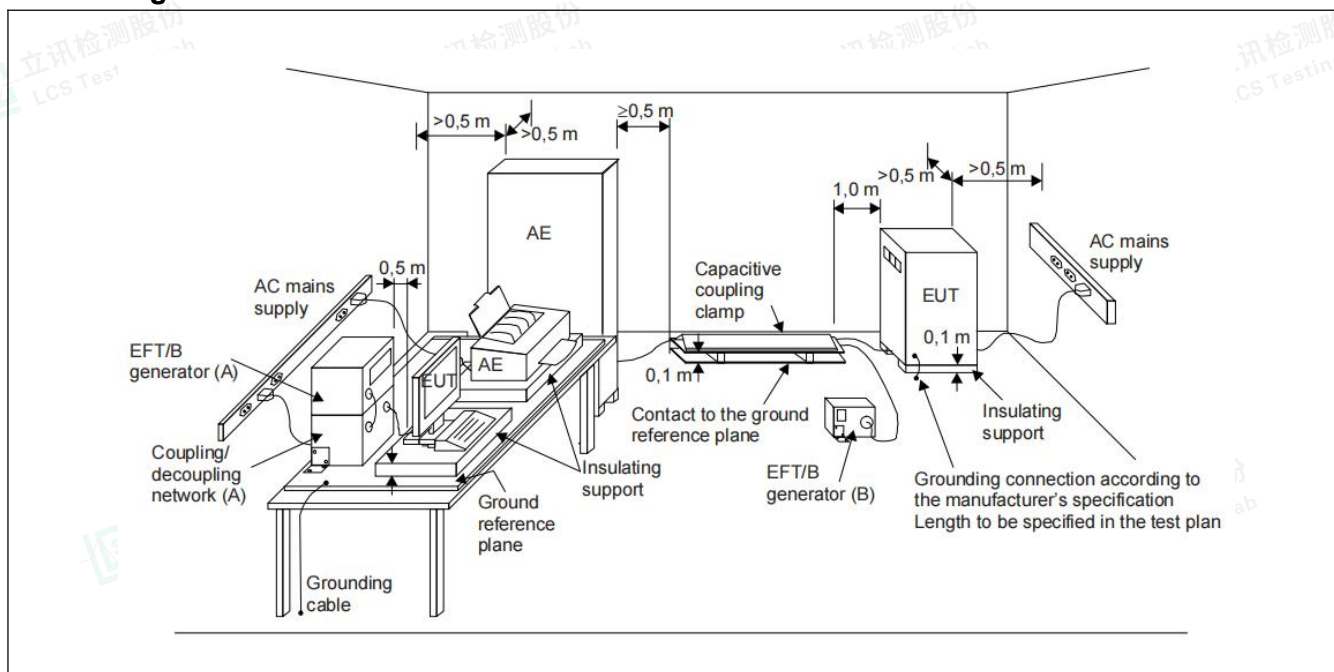

Test Results refer to Annex A.6



Shenzhen Southern LCS Compliance Testing Laboratory Ltd.

101-201, No. 39 Building, Xialang Industrial Zone, Heshuikou Community, Matian Street, Guangming District, Shenzhen, China.

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com.

Scan code to check authenticity.



6.5. INJECTED CURRENTS (RADIO-FREQUENCY COMMON MODE)

During the test the immunity of the EUT for conducted electromagnetic fields is checked .


The equipment to be tested is placed on an insulating support of $0,1 \text{ m} \pm 0,05 \text{ m}$ height above a reference ground plane. a non conductive roller / caster in the range of $0,1 \text{ m} \pm 0,05 \text{ m}$ above the reference ground plane can be used as an alternative to an insulating support. all cables exiting the EUT shall be supported at a height of at least 30 mm above the reference ground plane. The coupling and decoupling devices shall be placed on the reference ground plane, making direct contact with it at a distance of 0,1 m to 0,3 m from the EUT.

Requirements

Standard		EN 61547:2009			
Basic standard		EN 61000-4-6			
Frequency range		0,15 - 80 MHz			
Port under test		Test level	Modulation	Dwell time	Step size
☒	AC input / output power	3 V	1 kHz, 80 % AM	$\geq 0,5 \text{ s}$	$\leq 1\%$
☐	DC input / output power ^{1 2}	3 V	1 kHz, 80 % AM	$\geq 0,5 \text{ s}$	$\leq 1\%$
☐	Signal / control line ²	3 V	1 kHz, 80 % AM	$\geq 0,5 \text{ s}$	$\leq 1\%$

1) Not applicable to equipment not connected to the mains while in use.
2) Only applicable to ports interfacing with cables whose total length may exceed 3 m.

Test configuration

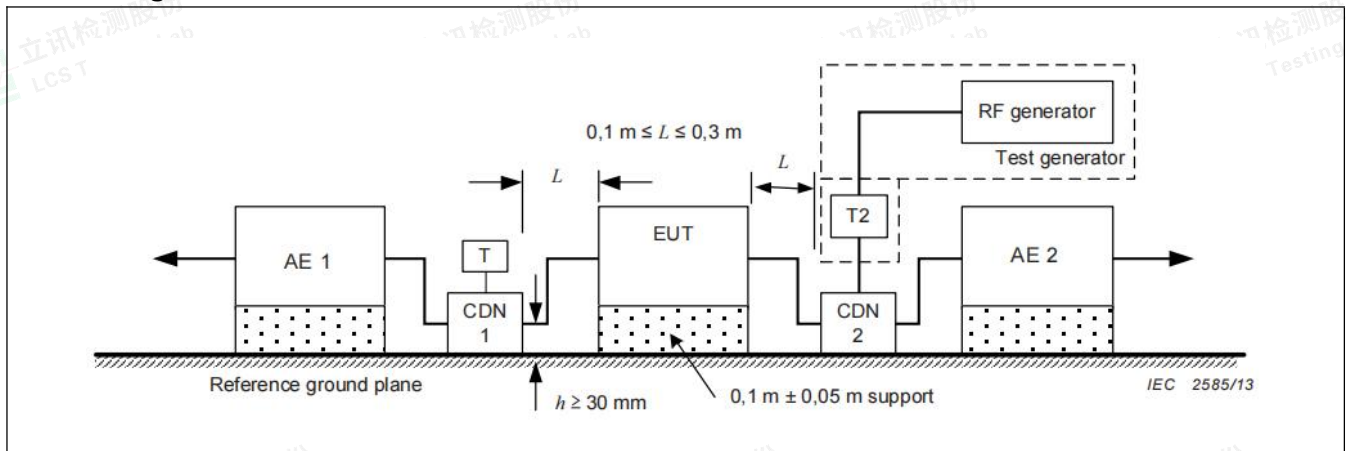

Test Results refer to Annex A.6





6.6. SURGE

The surge immunity test simulates unidirectional surges caused by overvoltages from switching and lightning transients.


The surge is applied to the EUT power supply terminal via the capacitive coupling network, to the EUT power supply provide a 1,2/50 μ s voltage surge (at open-circuit condition), at least 5 positive and 5 negative tests with 1 min or less repetition rate are conducted during test. and phase angles is 90° and 270°.

Requirements

Standard		EN 61547:2009			
Basic standard		EN 61000-4-5			
Pulse wave-shape		1,2/50 μ s			
Repetition rate		1 per minute or faster			
Number of pulses		5 pulses (at each polarity and phase angles)			
Classification		Port under test	Test Level	Coupling	Phase angle
☒	Luminaires and independent auxiliaries Input power >25W	AC input power	+ 1 kV	line - line	90°
			- 1 kV	line - line	270°
			+ 2 kV	line - ground	90°
			- 2 kV	line - ground	270°
☐	Luminaires and independent auxiliaries Input power $\leq$ 25W	AC input power	+ 0,5 kV	line - line	90°
			- 0,5 kV	line - line	270°
			+ 1 kV	line - ground	90°
			- 1 kV	line - ground	270°
☐	Self-ballasted lamps and semi-luminaires	AC input power	+ 0,5 kV	line - line	90°
			- 0,5 kV	line - line	270°
			+ 1 kV	line - ground	90°
			- 1 kV	line - ground	270°

1) In addition to the specified test level, all lower test levels as detailed in EN 61000-4-5 should also be satisfied.

Test configuration

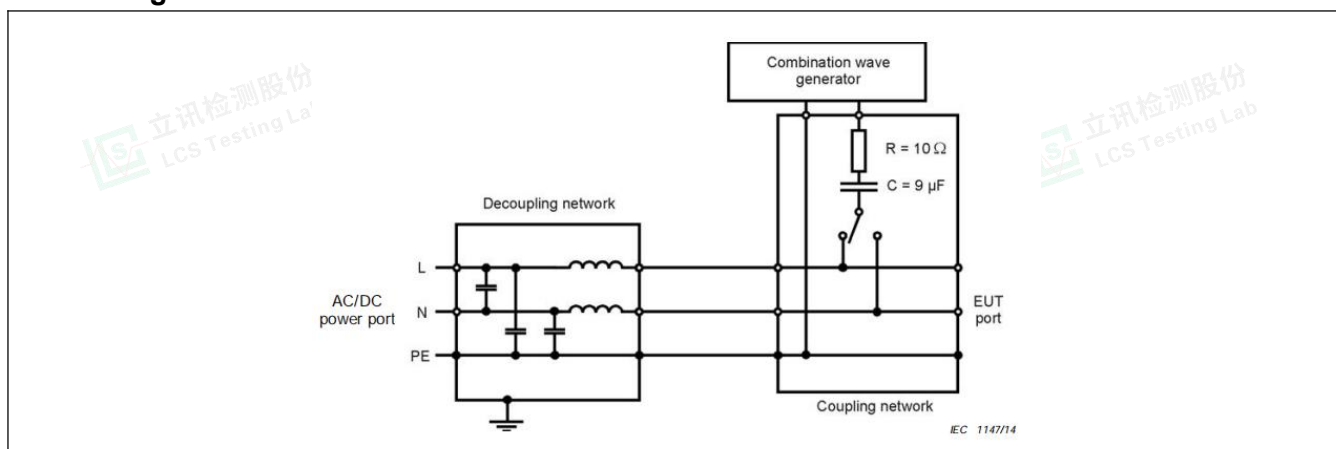

Test Results refer to Annex A.6





6.7. VOLTAGE DIPS AND SHORT INTERRUPTIONS

The surge immunity test simulates Voltage dips and short interruptions occur due to faults in a (public or non-public) network or in installations by sudden changes of large loads.

The EUT shall be connected to the test generator for testing using the shortest power cable specified by the EUT manufacturer and, if no cable length is specified, the shortest cable suitable for the EUT, each representative mode of operation shall be tested. for short interruptions to use 0° for one of the phases.


Requirements

Standard	EN 61547:2009		
Basic standard	EN 61000-4-11		
# of dips / interruptions	3 dips / interruptions for each test level and phase angle		
Intervals between events	≥ 10 s		
Port under test	Test level ¹	Number of periods (cycles)	
		50Hz	60Hz
AC input power	70% of U_{NOM}	10	12
	0% of U_{NOM}	0,5	0,5

1) Where the equipment has a rated voltage range the following shall apply:

- If the voltage range does not exceed 20 % of the lower voltage specified for the rated voltage range, a single voltage within that range may be specified as a basis for the test level specification.
- in all other cases, the test procedure shall be applied for both the lowest and highest voltages declared in the voltage range.

Test configuration

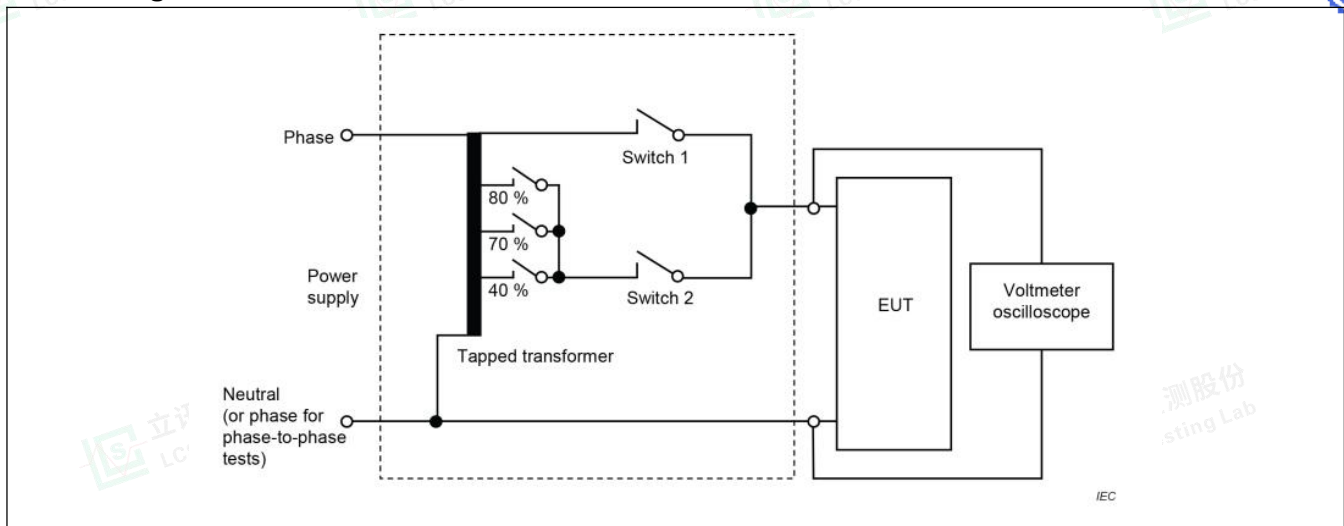

Test Results refer to Annex A.6



Shenzhen Southern LCS Compliance Testing Laboratory Ltd.

101-201, No. 39 Building, Xialang Industrial Zone, Heshuikou Community, Matian Street, Guangming District, Shenzhen, China.

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com.


Scan code to check authenticity.



ANNEX A - TEST RESULTS

A.1. CONDUCTED DISTURBANCE TEST RESULTS

Environmental Conditions	24.2°C, 54% RH
Model	Krypton P600
Operating mode	Mode 1 (worst case)
Test voltage	AC 230V,50Hz
Test engineer	Zom Zhang
Pol	Line

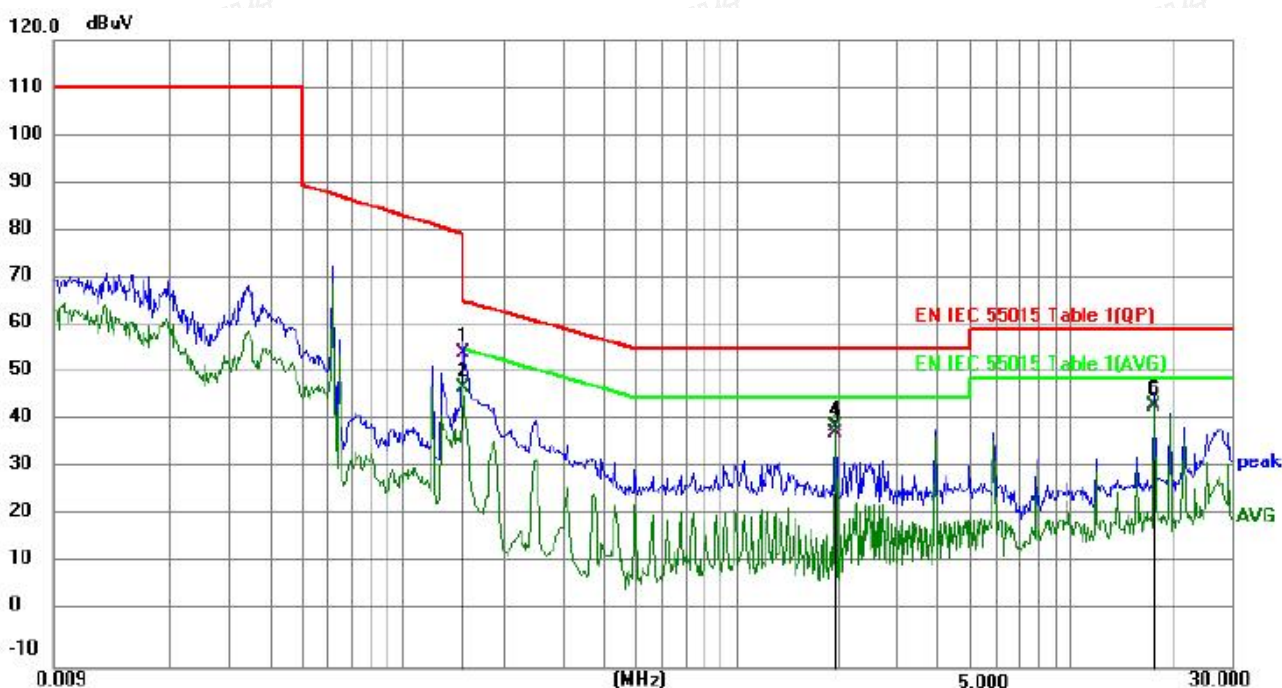

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		0.1500	44.15	10.87	55.02	66.00	-10.98	QP	
2		0.1500	37.20	10.87	48.07	56.00	-7.93	AVG	
3		1.9590	27.55	10.94	38.49	56.00	-17.51	QP	
4		1.9590	28.99	10.94	39.93	46.00	-6.07	AVG	
5		17.6144	33.10	11.12	44.22	60.00	-15.78	QP	
6	*	17.6144	33.45	11.12	44.57	50.00	-5.43	AVG	



Shenzhen Southern LCS Compliance Testing Laboratory Ltd.


101-201, No. 39 Building, Xialang Industrial Zone, Heshuikou Community, Matian Street, Guangming District, Shenzhen, China.

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com.

Scan code to check authenticity.



Environmental Conditions	24.2°C, 54% RH
Model	Krypton P600
Operating mode	Mode 1 (worst case)
Test voltage	AC 230V,50Hz
Test engineer	Zom Zhang
Pol	Neutral

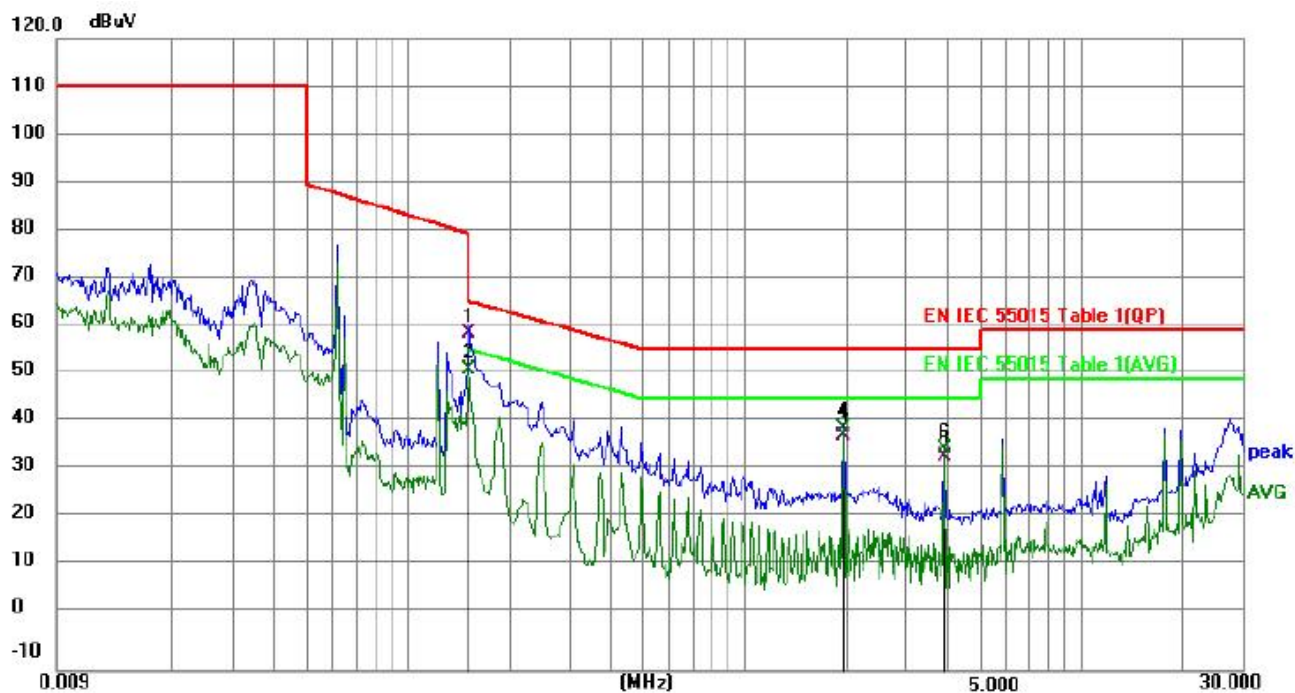

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		0.1500	48.38	10.87	59.25	66.00	-6.75	QP	
2	*	0.1500	41.05	10.87	51.92	56.00	-4.08	AVG	
3		1.9543	27.21	10.94	38.15	56.00	-17.85	QP	
4		1.9543	29.06	10.94	40.00	46.00	-6.00	AVG	
5		3.9120	23.07	10.98	34.05	56.00	-21.95	QP	
6		3.9120	24.56	10.98	35.54	46.00	-10.46	AVG	



**A.2. RADIATED DISTURBANCE TEST RESULTS (9kHz - 30MHz)**

Environmental Conditions	24.2°C, 54% RH
Model	Krypton P600
Operating mode	Mode 1 (worst case)
Test voltage	AC 230V, 50Hz
Test engineer	Zom Zhang
Pol	X



No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuA	dB	dBuA	dBuA	dB		
1		3.0434	-29.76	24.96	-4.80	22.00	-26.80	QP	
2		12.7635	-28.98	25.92	-3.06	22.00	-25.06	QP	
3	*	29.5030	-22.93	23.49	0.56	22.00	-21.44	QP	





Environmental Conditions	24.2°C, 54% RH
Model	Krypton P600
Operating mode	Mode 1 (worst case)
Test voltage	AC 230V, 50Hz
Test engineer	Zom Zhang
Pol	Y




No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over		
		MHz	Level	Factor	ment			Detector	Comment
			dBuA	dB	dBuA	dBuA	dB		
1		8.0205	-28.08	26.10	-1.98	22.00	-23.98	QP	
2	*	15.2835	-26.58	25.98	-0.60	22.00	-22.60	QP	
3		27.7890	-25.35	23.96	-1.39	22.00	-23.39	QP	





Environmental Conditions	24.2℃, 54% RH
Model	Krypton P600
Operating mode	Mode 1 (worst case)
Test voltage	AC 230V,50Hz
Test engineer	Zom Zhang
Pol	Z

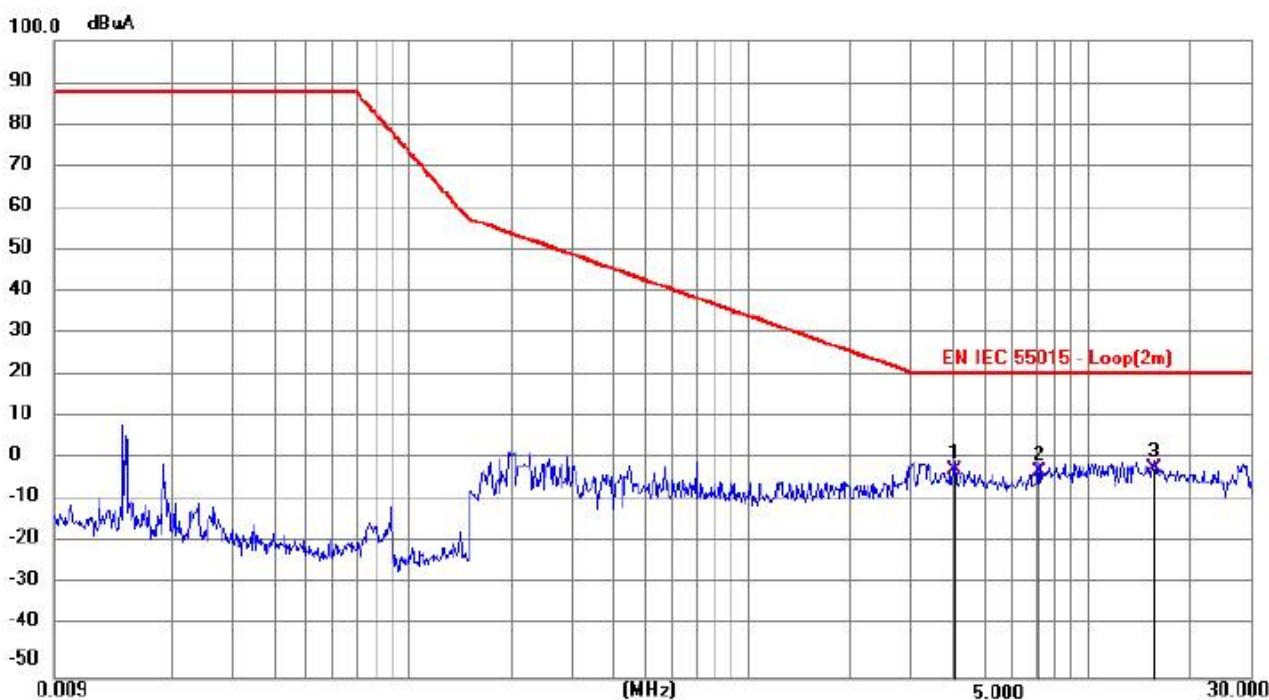

No.	Mk.	Freq. MHz	Reading Level dBuA	Correct Factor dB	Measure- ment dBuA	Limit dBuA	Over dB	Detector	Comment
1		4.0605	-27.47	26.47	-1.00	22.00	-23.00	QP	
2		7.1700	-27.31	25.95	-1.36	22.00	-23.36	QP	
3	*	15.6030	-27.01	26.33	-0.68	22.00	-22.68	QP	





A.3. RADIATED DISTURBANCE TEST RESULTS (30MHz - 1GHz)

Environmental Conditions	24.5°C, 56% RH
Model	Krypton P600
Operating mode	Mode 1 (worst case)
Test voltage	AC 230V, 50Hz
Test engineer	Zom Zhang
Pol	Vertical



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Antenna Height cm	Table Degree degree	Comment
1		30.6509	21.61	10.50	32.11	40.00	-7.89	QP		
2		146.1809	18.18	10.82	29.00	40.00	-11.00	QP		
3		167.4567	21.64	10.93	32.57	40.00	-7.43	QP		
4	*	365.5389	25.27	15.98	41.25	47.00	-5.75	QP		
5		432.7352	23.96	17.07	41.03	47.00	-5.97	QP		
6		945.0256	14.46	24.12	38.58	47.00	-8.42	QP		





Environmental Conditions	24.5°C, 56% RH
Model	Krypton P600
Operating mode	Mode 1 (worst case)
Test voltage	AC 230V,50Hz
Test engineer	Zom Zhang
Pol	Horizontal



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Antenna Height cm	Table Degree	Detector	Comment
1		31.1797	22.41	10.61	33.02	40.00	-6.98	QP			
2		93.5631	16.16	10.85	27.01	40.00	-12.99	QP			
3		173.5089	22.36	10.86	33.22	40.00	-6.78	QP			
4	*	329.6162	26.27	14.98	41.25	47.00	-5.75	QP			
5		419.4755	21.05	17.10	38.15	47.00	-8.85	QP			
6		448.7683	20.85	17.46	38.31	47.00	-8.69	QP			






A.4. HARMONIC CURRENT TEST RESULTS


Model	Krypton P600
Operating mode	Mode 1
Test voltage	AC 230V,50Hz
Test engineer	Zom Zhang

Test Result: **Pass** Source qualification(Power On Load): **Idle - Pass**

Current & voltage waveforms

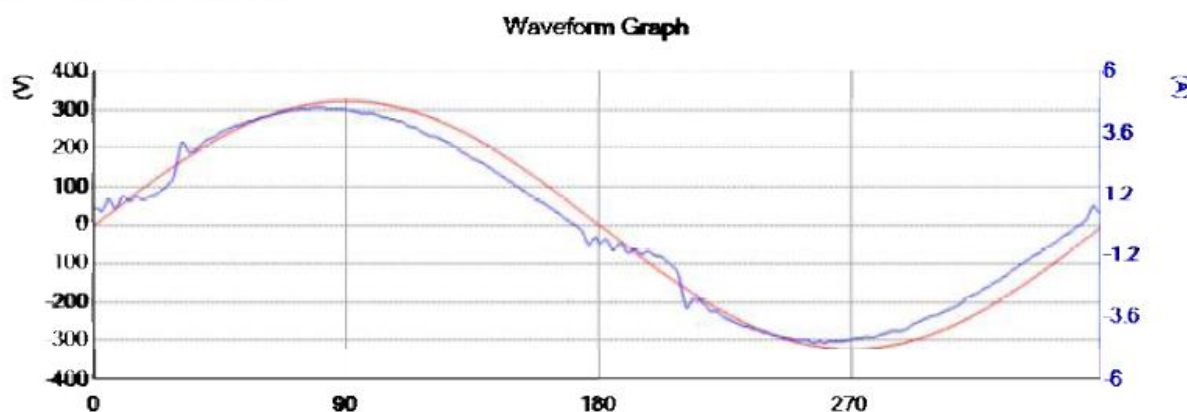

Harmonics and Class A

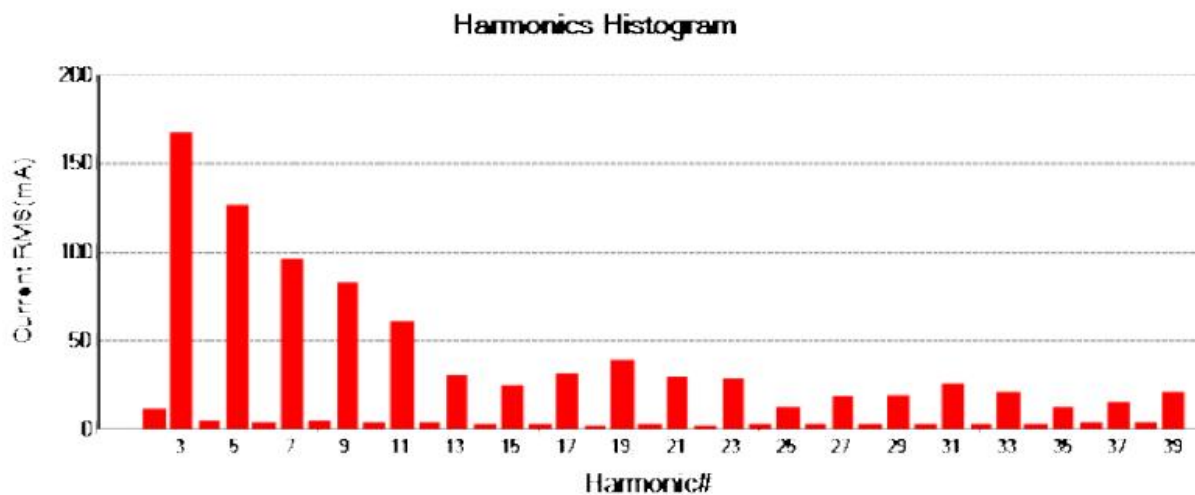



Model	Krypton P600
Operating mode	Mode 1
Test voltage	AC 230V,50Hz
Test engineer	Zom Zhang

Test Result: **Pass** Source qualification(Power On Load): **Idle - Pass**

THC(mA): 269.000 I - THD(%): 8.6 POHC(mA):68.100 POHC Limit(mA):251.353

Parameter values during test:

V_{RMS} (Volts): 229.8

Frequency(Hz): 50.0

I_{RMS} (A): 3.2

Crest Factor: 1.446

Power (Watts): 719.3

Power Factor: 0.992

Harm#	Harms(filtered) (mA)	Limit (mA)	Harms(avg) (mA)	100%Limit	Harms(max) (mA)	150%Limit	Status
I_Fund	3140.700						
2	11.600	1080.000	10.700	0.991	12.900	0.796	Pass
3	165.800	2300.000	166.400	7.235	168.400	4.881	Pass
4	5.000	430.000	4.600	1.070	5.300	0.822	Pass
5	126.400	1140.000	126.000	11.053	127.600	7.462	Pass
6	4.300	300.000	4.300	1.433	4.800	1.067	Pass
7	96.200	770.000	96.300	12.506	97.200	8.416	Pass
8	4.400	230.000	4.700	2.043	5.300	1.536	Pass
9	83.000	400.000	83.300	20.825	83.900	13.983	Pass
10	3.500	184.000	3.700	2.011	4.100	1.486	Pass
11	61.500	330.000	61.500	18.636	62.300	12.586	Pass
12	3.500	153.300	3.300	2.153	3.700	1.609	Pass
13	30.900	210.000	30.900	14.714	31.600	10.032	Pass
14	2.600	131.400	2.800	2.131	3.000	1.522	Pass
15	25.700	150.000	25.600	17.067	26.000	11.556	Pass
16	2.800	115.000	2.800	2.435	3.200	1.855	Pass
17	30.900	132.400	30.800	23.263	32.300	16.264	Pass
18	2.500	102.200	2.600	2.544	2.800	1.826	Pass
19	39.000	118.400	39.200	33.108	40.100	22.579	Pass
20	2.600	92.000	2.700	2.935	3.000	2.174	Pass
21	29.400	107.100	29.700	27.731	30.300	18.861	Pass
22	2.500	83.600	2.400	2.871	2.600	2.073	Pass
23	28.400	97.800	28.600	29.243	28.900	19.700	Pass
24	2.800	76.700	2.800	3.651	3.200	2.781	Pass
25	12.700	90.000	12.900	14.333	13.300	9.852	Pass
26	2.600	70.800	2.700	3.814	3.200	3.013	Pass
27	18.800	83.300	19.000	22.809	19.600	15.686	Pass
28	2.800	65.700	2.800	4.262	3.000	3.044	Pass
29	19.400	77.600	19.100	24.613	19.700	16.924	Pass
30	2.500	61.300	2.800	4.568	3.000	3.263	Pass
31	25.700	72.600	26.200	36.088	26.900	24.702	Pass
32	2.800	57.500	3.000	5.217	3.400	3.942	Pass
33	21.200	68.200	21.200	31.085	21.900	21.408	Pass
34	3.000	54.100	3.000	5.545	3.400	4.190	Pass
35	11.800	64.300	12.000	18.663	12.500	12.960	Pass
36	3.200	51.100	3.200	6.262	3.500	4.566	Pass
37	15.600	60.800	15.800	25.987	16.300	17.873	Pass
38	3.400	48.400	3.400	7.025	3.900	5.372	Pass
39	21.700	57.700	21.300	36.915	22.100	25.534	Pass
40	3.200	46.000	3.100	6.739	3.400	4.928	Pass

Note: All harmonics are below the minimum limits and are ignored.



Shenzhen Southern LCS Compliance Testing Laboratory Ltd.

101-201, No. 39 Building, Xialang Industrial Zone, Heshuikou Community, Matian Street, Guangming District, Shenzhen, China.

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com.

Scan code to check authenticity.



Model	Krypton P600
Operating mode	Mode 1
Test voltage	AC 230V,50Hz
Test engineer	Zom Zhang

Source qualification(Power On Load): **Pass**

Measurements are compliant with IEC/EN61000-3-2 Ed. 4 & IEC/EN61000-4-7 Ed. 2.1

	Nominal	Measured	Measured	Deviation	Allowed	Result
		Low	High		Deviation	
Supply Voltage	230	229.71	229.84	0.29	4.6	Pass
Supply Frequency	50	50.0	50.0	0.0	0.25	Pass
Crest Phase	90.0	89.2	89.7	0.8	87 - 93	N/A
Crest Factor	1.414	1.414	1.415	0.001	1.40 - 1.42	N/A
Fundamental Voltage	229.77	-	-	-	-	-

Harm#	Harmonics Voltage	Harmonic Ratio	Limit	Result
2	0.050	0.034	0.200	Pass
3	0.170	0.106	0.900	Pass
4	0.050	0.031	0.200	Pass
5	0.040	0.041	0.400	Pass
6	0.020	0.016	0.200	Pass
7	0.040	0.030	0.300	Pass
8	0.010	0.007	0.200	Pass
9	0.030	0.019	0.200	Pass
10	0.010	0.010	0.100	Pass
11	0.020	0.018	0.100	Pass
12	0.000	0.003	0.100	Pass
13	0.010	0.010	0.100	Pass
14	0.000	0.003	0.100	Pass
15	0.010	0.010	0.100	Pass
16	0.000	0.003	0.100	Pass
17	0.020	0.016	0.100	Pass
18	0.000	0.003	0.100	Pass
19	0.030	0.018	0.100	Pass
20	0.000	0.001	0.100	Pass
21	0.020	0.016	0.100	Pass
22	0.000	0.003	0.100	Pass
23	0.030	0.016	0.100	Pass
24	0.000	0.003	0.100	Pass
25	0.010	0.008	0.100	Pass
26	0.000	0.003	0.100	Pass
27	0.020	0.010	0.100	Pass
28	0.000	0.001	0.100	Pass
29	0.030	0.015	0.100	Pass
30	0.000	0.001	0.100	Pass
31	0.030	0.018	0.100	Pass
32	0.000	0.003	0.100	Pass
33	0.030	0.016	0.100	Pass
34	0.000	0.003	0.100	Pass
35	0.010	0.010	0.100	Pass
36	0.000	0.003	0.100	Pass
37	0.020	0.012	0.100	Pass
38	0.000	0.003	0.100	Pass
39	0.030	0.019	0.100	Pass
40	0.000	0.003	0.100	Pass



Shenzhen Southern LCS Compliance Testing Laboratory Ltd.

101-201, No. 39 Building, Xialang Industrial Zone, Heshuikou Community, Matian Street, Guangming District, Shenzhen, China.

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com.

Scan code to check authenticity.



A.5. VOLTAGE FLUCTUATIONS & FLICKER TEST RESULTS

Model	Krypton P600
Operating mode	Mode 1
Test voltage	AC 230V,50Hz
Test engineer	Zom Zhang

Load Power : 0.717 kW
Load Current : 3.055 Arms
Nominal Voltage : 229.14 Vrms


Power Factor:0.992
Crest Factor:1.450

Test Result: Pass

Status: Test Completed

Pst_i and limit line

European Limits

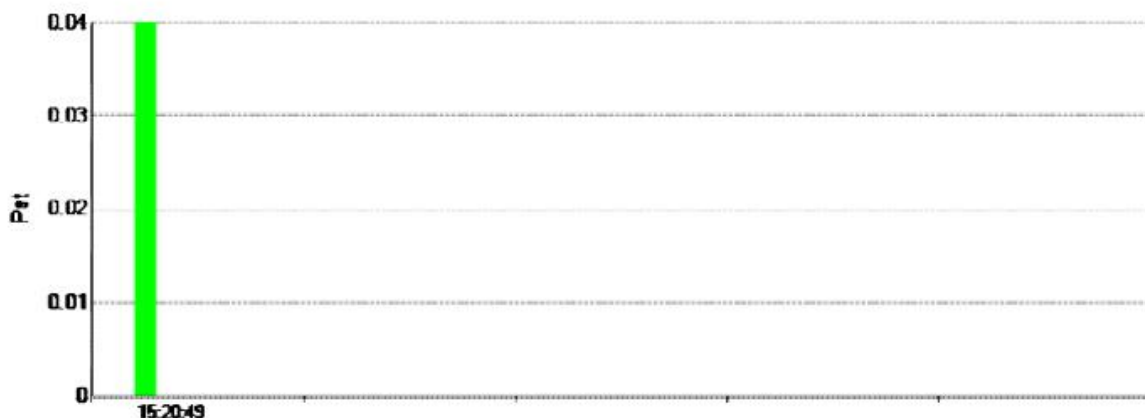

Result:

T-max (ms):	0.00	Test limit (ms):	500.00	Pass
Highest dc (%):	0.00	Test limit (%):	3.30	Pass
Highest dmax (%):	0.00	Test limit (%):	4.00	Pass
Highest Pst (10 min. period):	0.04	Test limit:	1.00	Pass
Highest Plt (2 hr. period):	0.00	Test limit:	0.65	Pass



Shenzhen Southern LCS Compliance Testing Laboratory Ltd.

101-201, No. 39 Building, Xialang Industrial Zone, Heshuikou Community, Matian Street, Guangming District, Shenzhen, China.

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com.

Scan code to check authenticity.

**A.6. IMMUNITY TEST RESULTS**

ELECTROSTATIC DISCHARGE IMMUNITY TEST RESULTS					
Standard	☒ EN 61547:2009 ☒ EN 61000-4-2				
EUT	Stage luminaire	Temperature	23.5℃		
M/N	Krypton P600	Humidity	52%		
Test Mode	Mode 1	Pressure	1008mbar		
Input voltage	AC 230V,50Hz	Test Results	Pass		
Test engineer	Zom Zhang				
Discharge Mode	Test Points	Test Voltage (kV) & polarity	Number of discharges/polarity	Discharge interval (s)	Performance Criteria
Contact Discharge	Conductive surfaces	± 4	10	1	B
Air Discharge	Insulating surfaces	± 2&4&8	10	1	B
VCP	-	± 4	10	1	B
HCP	-	± 4	10	1	B
Note:					



**RADIO-FREQUENCY ELECTROMAGNETIC FIELD IMMUNITY TEST RESULTS**

Standard	☒ EN 61547:2009		☒ EN 61000-4-3	
EUT	Stage luminaire		Temperature	22.5°C
M/N	Krypton P600		Humidity	55%
Test Mode	Mode 1		Pressure	1008mbar
Input voltage	AC 230V,50Hz		Test engineer	Zom Zhang
Modulation	1 kHz, 80 % AM		Test Results	Pass
Steps	1%			
Angle of EUT	Antenna polarization	Frequency Range	Test Level	Performance Criteria
0°	Vertical Horizontal	80 - 1000 MHz	3 V/m	A
90°	Vertical Horizontal	80 - 1000 MHz	3 V/m	A
180°	Vertical Horizontal	80 - 1000 MHz	3 V/m	A
270°	Vertical Horizontal	80 - 1000 MHz	3 V/m	A

Note :



**ELECTRICAL FAST TRANSIENT/BURST IMMUNITY TEST RESULTS**

Standard	☒ EN 61547:2009		☒ EN 61000-4-4	
EUT	Stage luminaire		Temperature	23.6℃
M/N	Krypton P600		Humidity	52%
Test Mode	Mode 1		Pressure	1008mbar
Input voltage	AC 230V,50Hz		Test Results	Pass
Test engineer	Zom Zhang			
Port under test	Test Level & polarity	Repetition Frequency	Test duration / polarity	Performance Criteria
AC input / output power	± 1 kV	5 kHz	2min	B
DC input / output power				
Signal / control lines and load ports				

Note:



**INJECTED CURRENTS (RADIO-FREQUENCY COMMON MODE) TEST RESULTS**

Standard	☒ EN 61547:2009		☒ EN 61000-4-6	
EUT	Stage luminaire		Temperature	23.6℃
M/N	Krypton P600		Humidity	52%
Test Mode	Mode 1		Pressure	1008mbar
Input voltage	AC 230V,50Hz		Test Results	Pass
Frequency range	0,15 - 80 MHz		Test engineer	Zom Zhang
Port under test	Test Level	Coupling method	Dwell time	Performance Criteria
AC input / output power	3 V	CDN	1 seconds	A
DC input / output power				
Signal / control line				



**SURGE IMMUNITY TEST RESULTS**

Standard	☒ EN 61547:2009		☒ EN 61000-4-5			
EUT	Stage luminaire			Temperature	23.6°C	
M/N	Krypton P600			Humidity	52%	
Test Mode	Mode 1			Pressure	1008mbar	
Input voltage	AC 230V,50Hz			Test Results	Pass	
Test engineer	Zom Zhang					
Port under test	Coupling	Test Level & polarity(kV)	Phase angle (°)	Number of surges	Repetition rate(s)	Performance criteria
AC Input power	L - N	+ 1	90	5	60	C
		- 1	270	5	60	C
	L - PE	+ 2	90	5	60	C
		- 2	270	5	60	C
	N - PE	+ 2	90	5	60	C
		- 2	270	5	60	C
	L&N - PE	+ 2	90	5	60	C
		- 2	270	5	60	C

Note:



**VOLTAGE DIPS AND SHORT INTERRUPTIONS IMMUNITY TEST RESULTS**

Standard	☒ EN 61547:2009			☒ EN 61000-4-11	
EUT	Stage luminaire			Temperature	23.6℃
M/N	Krypton P600			Humidity	52%
Test Mode	Mode 1			Pressure	1008mbar
Input voltage	AC 230V,50Hz			Test Results	Pass
Test engineer	Zom Zhang				
U _{NOM} (Vac)	Test Level (% U _{NOM})	Number of periods		Phase angle (°)	Performance criteria
		50Hz	60Hz		
230	70	10	12	0, 90, 180, 270	C
	0	0,5	0,5	0	B


Note:






ANNEX B - TEST PHOTOS

B.1. Conducted Disturbance

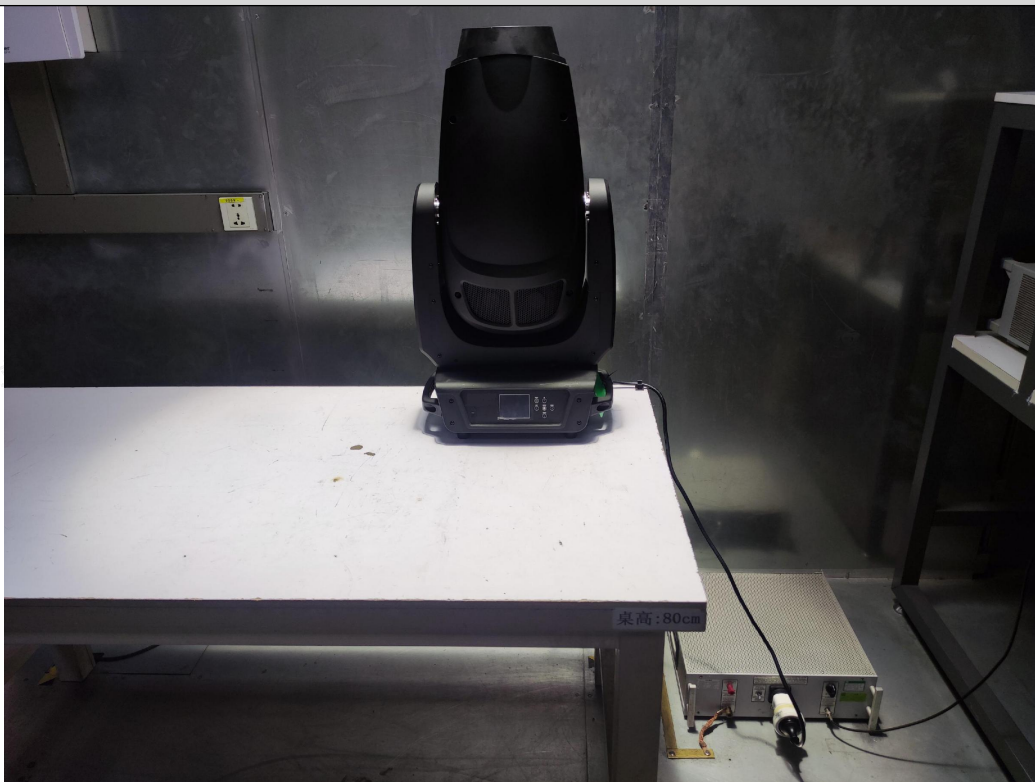

B.2. Radiated Disturbance (9kHz - 30MHz)

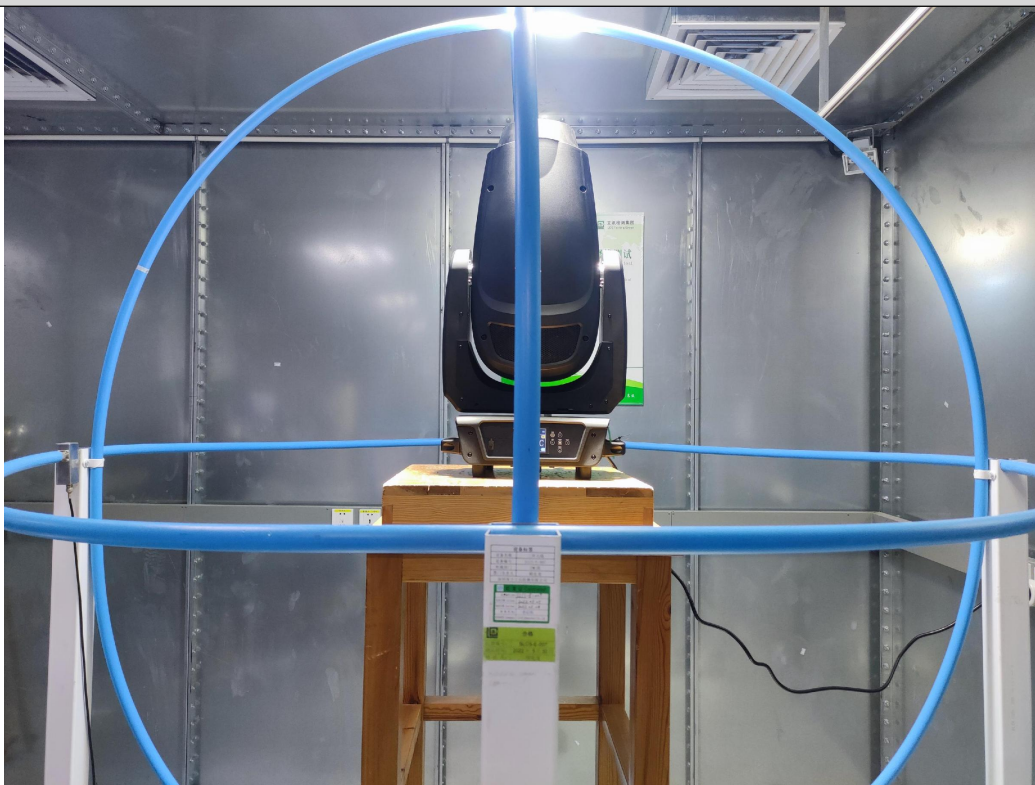

Shenzhen Southern LCS Compliance Testing Laboratory Ltd.

101-201, No. 39 Building, Xialang Industrial Zone, Heshuikou Community, Matian Street, Guangming District, Shenzhen, China.

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com.

Scan code to check authenticity.

B.3. Radiated Disturbance (30MHz to 1GHz) & Radio-Frequency Electromagnetic Fields



B.4. Harmonic Current & Flicker



B.5. Electrostatic Discharge



B.6. Electrical Fast Transient / Burst





B.7. Injected Currents (Radio-Frequency Common Mode)



B.8. Surge



Shenzhen Southern LCS Compliance Testing Laboratory Ltd.

101-201, No. 39 Building, Xialang Industrial Zone, Heshuikou Community, Matian Street, Guangming District, Shenzhen, China.

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com.

Scan code to check authenticity.



B.9. Voltage Dips and Short Interruptions





ANNEX C - EXTERNAL AND INTERNAL PHOTOS OF THE EUT



Photo.1



Photo.2





Photo.3



Photo.4



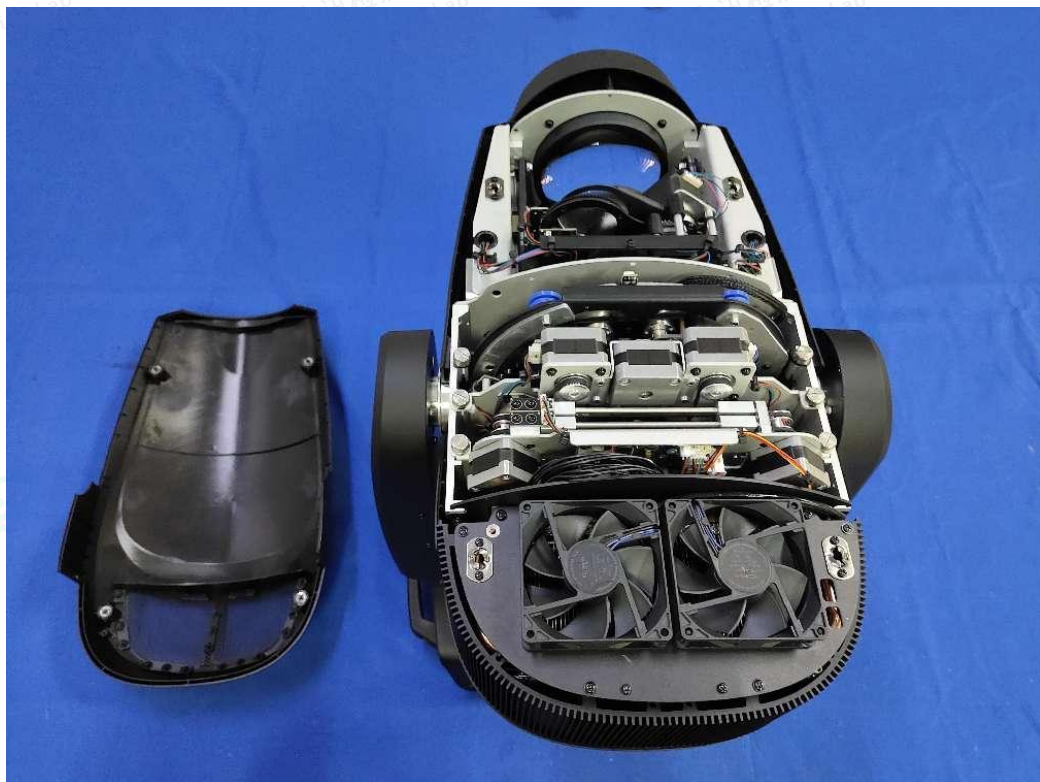


Photo.5

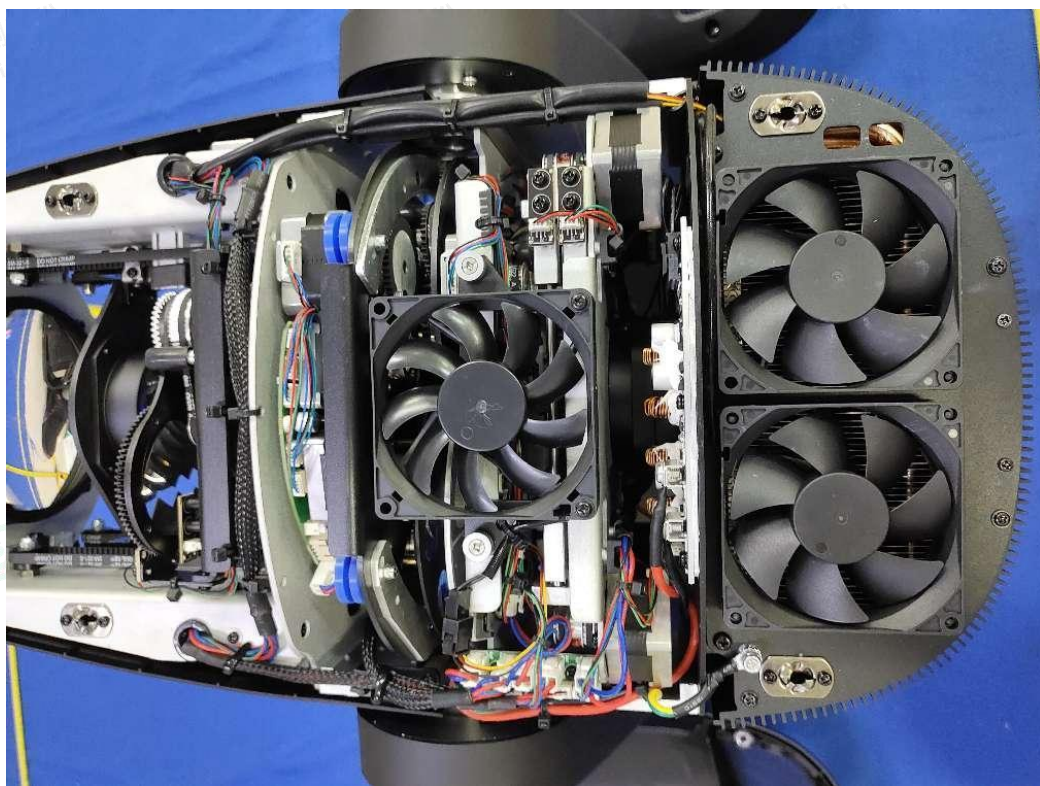


Photo.6



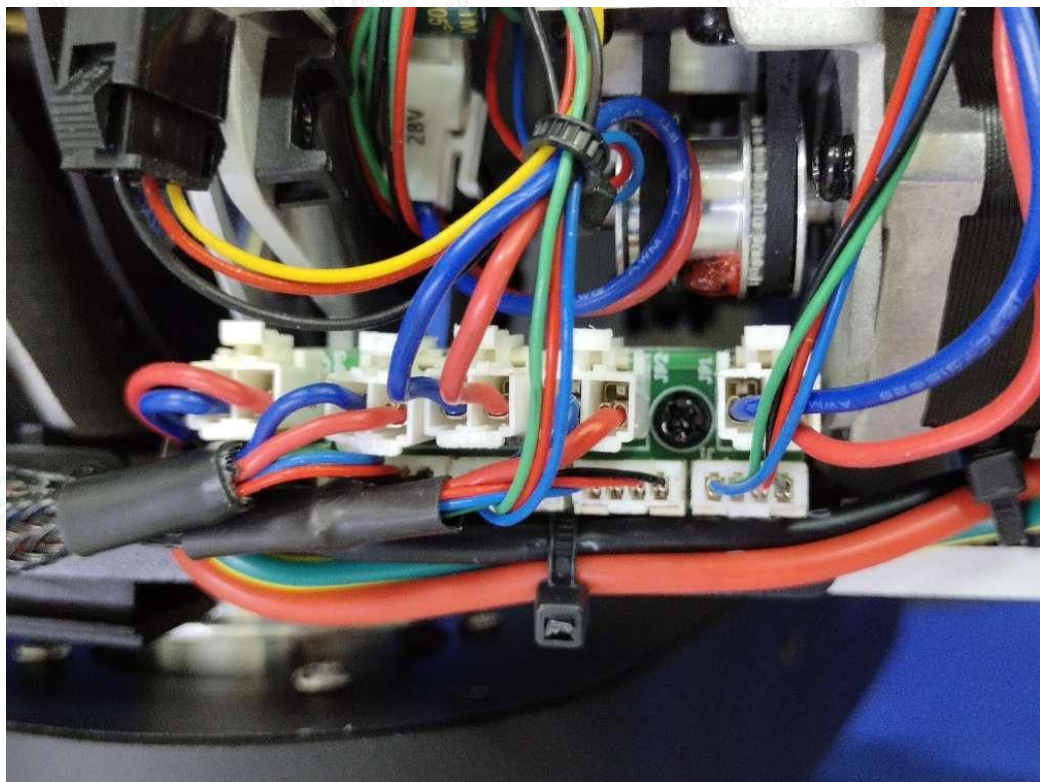


Photo.7

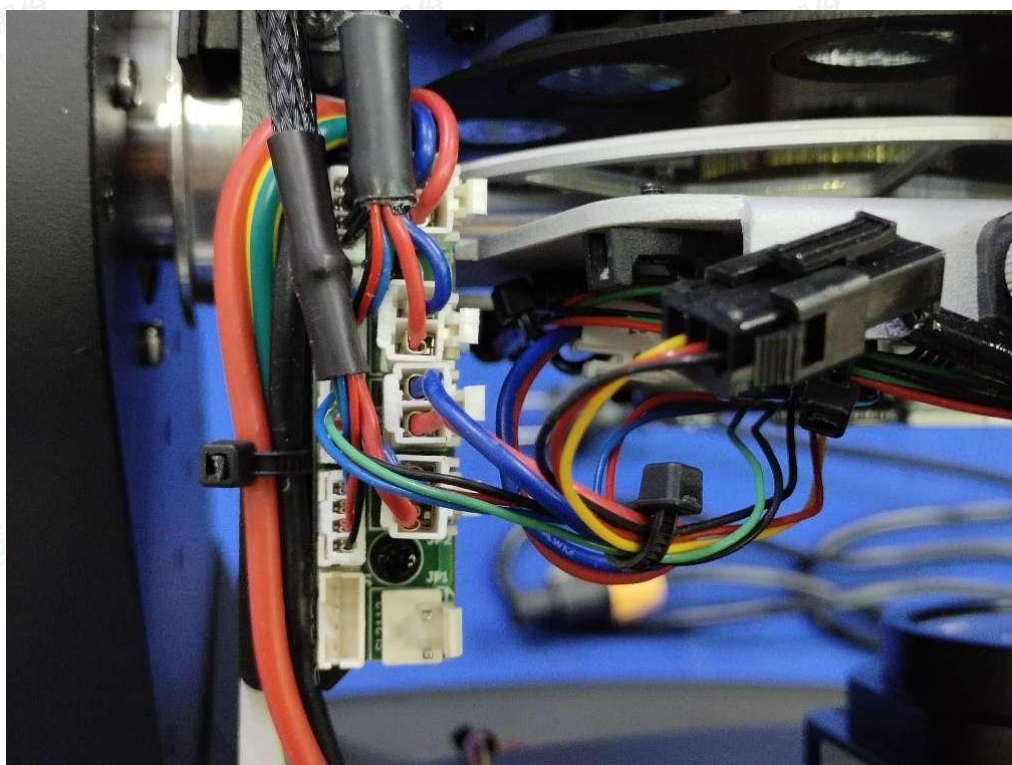


Photo.8





Photo.9

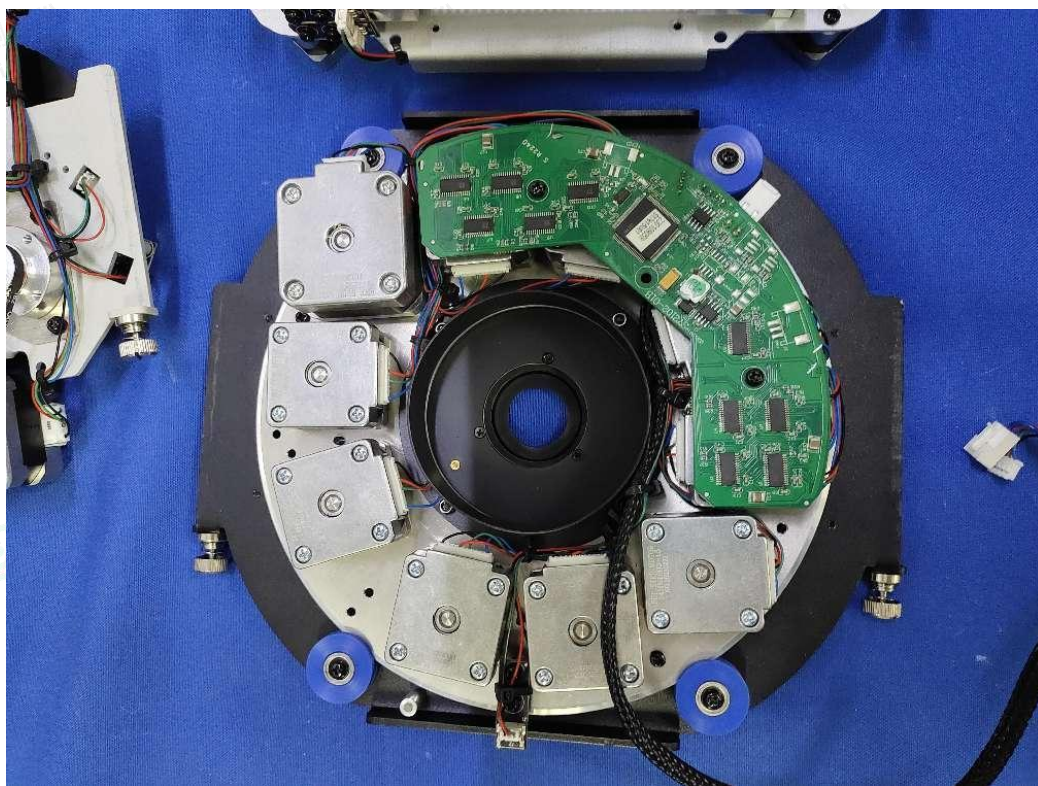


Photo.10



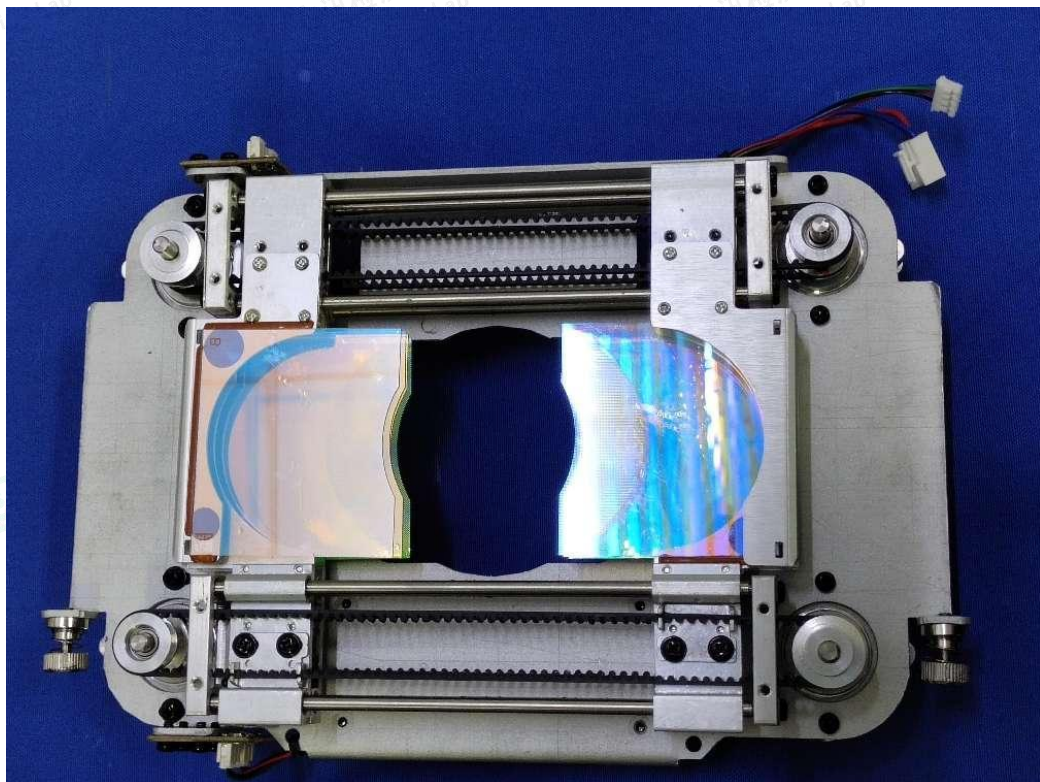


Photo.11

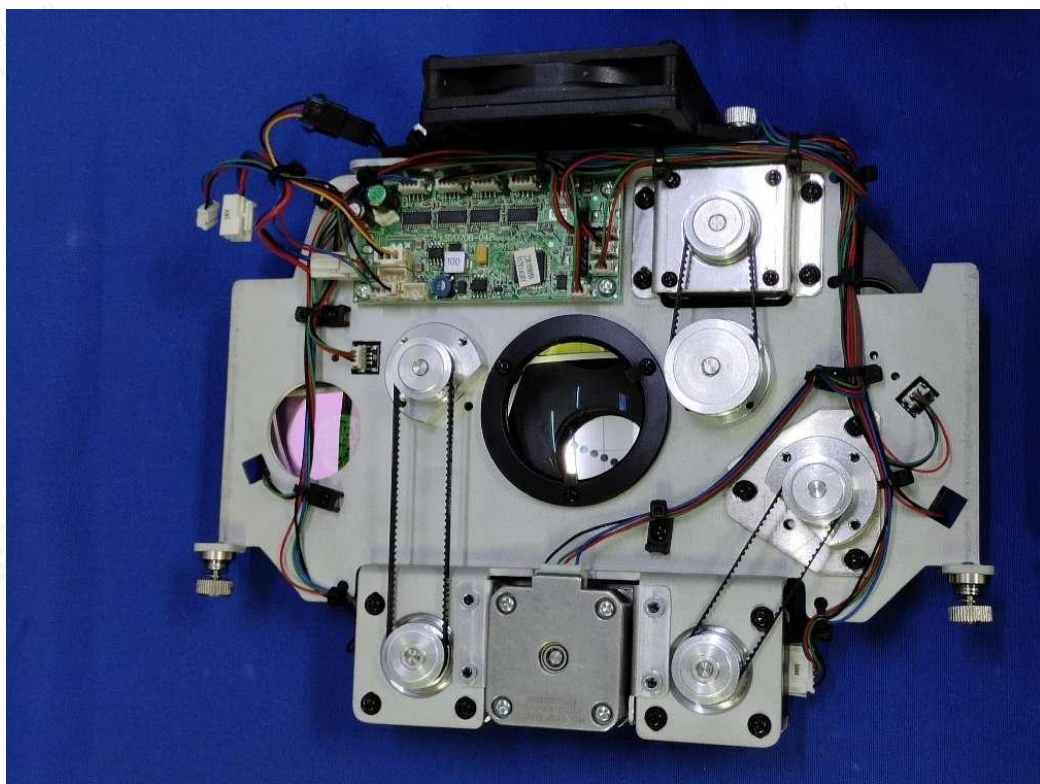


Photo.12





Photo.13

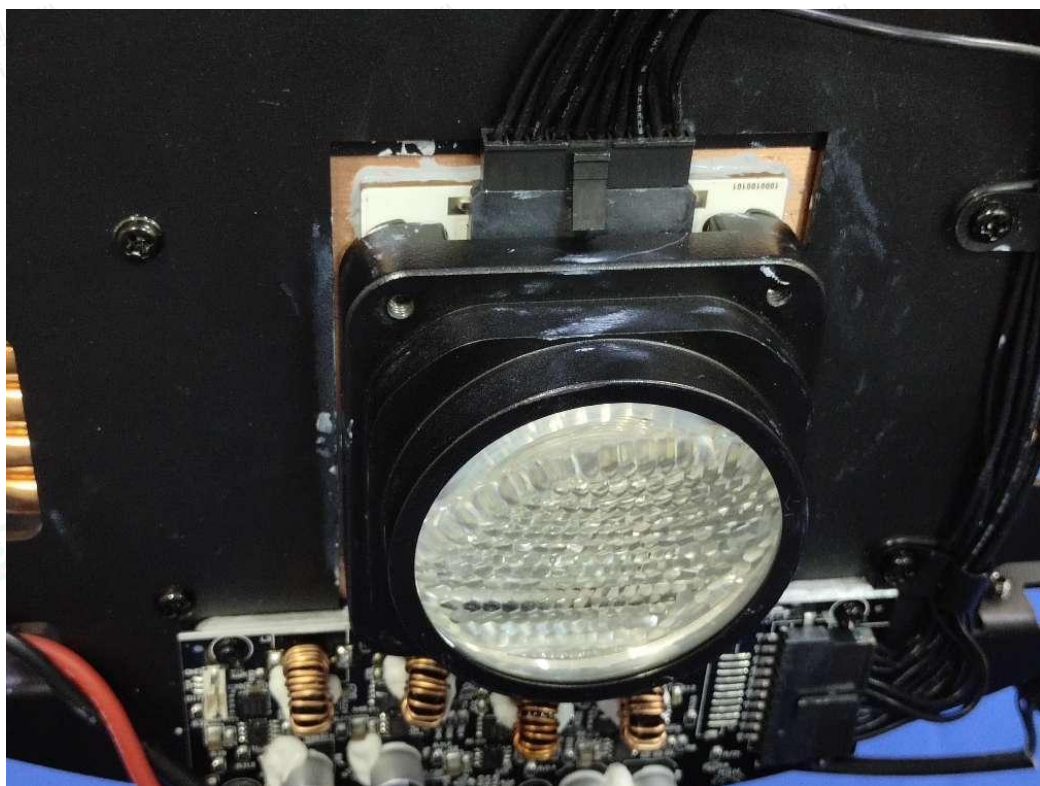


Photo.14



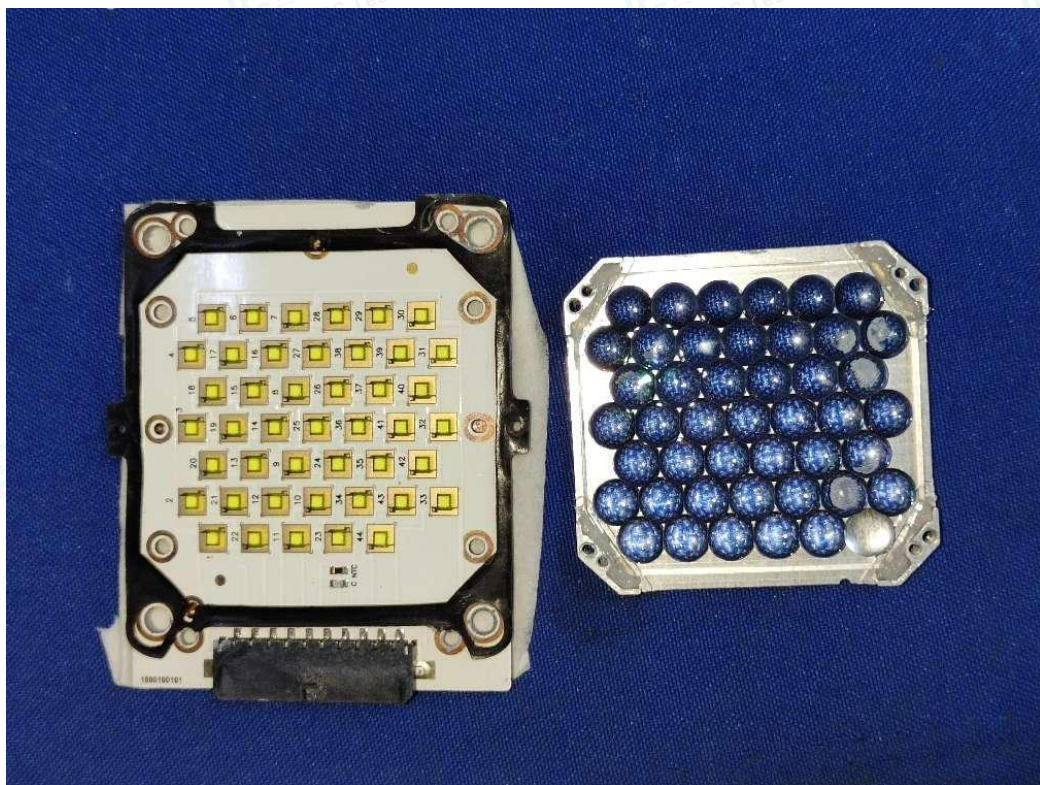


Photo.15

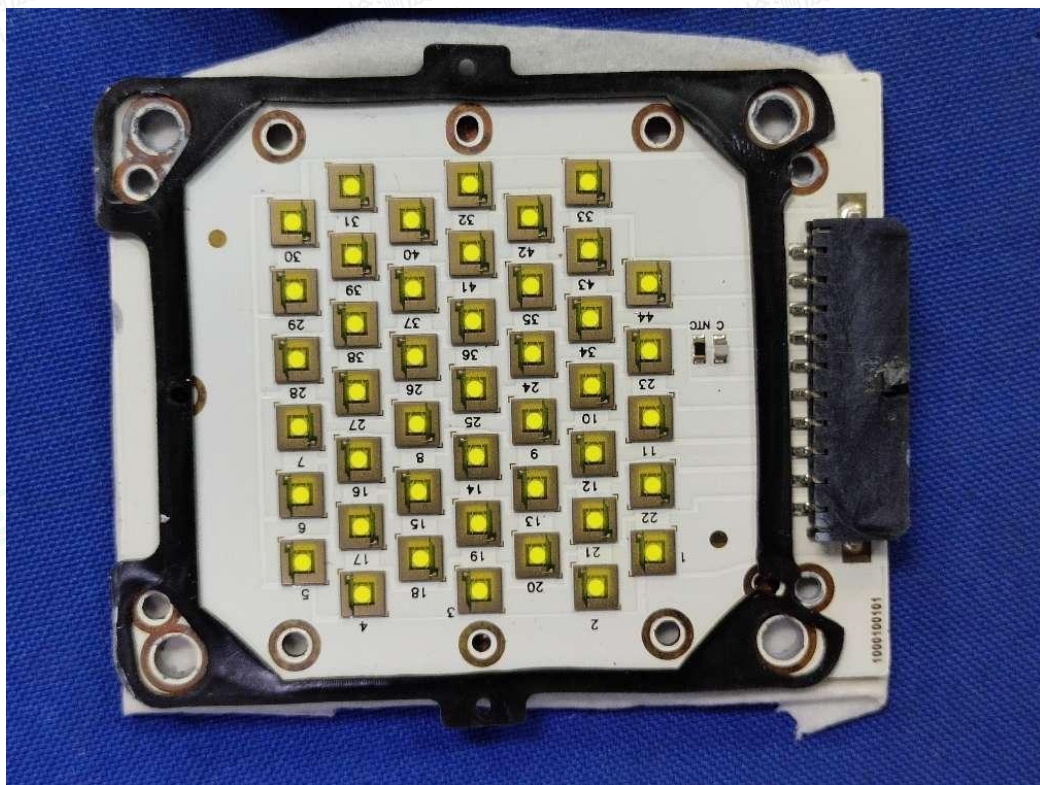


Photo.16



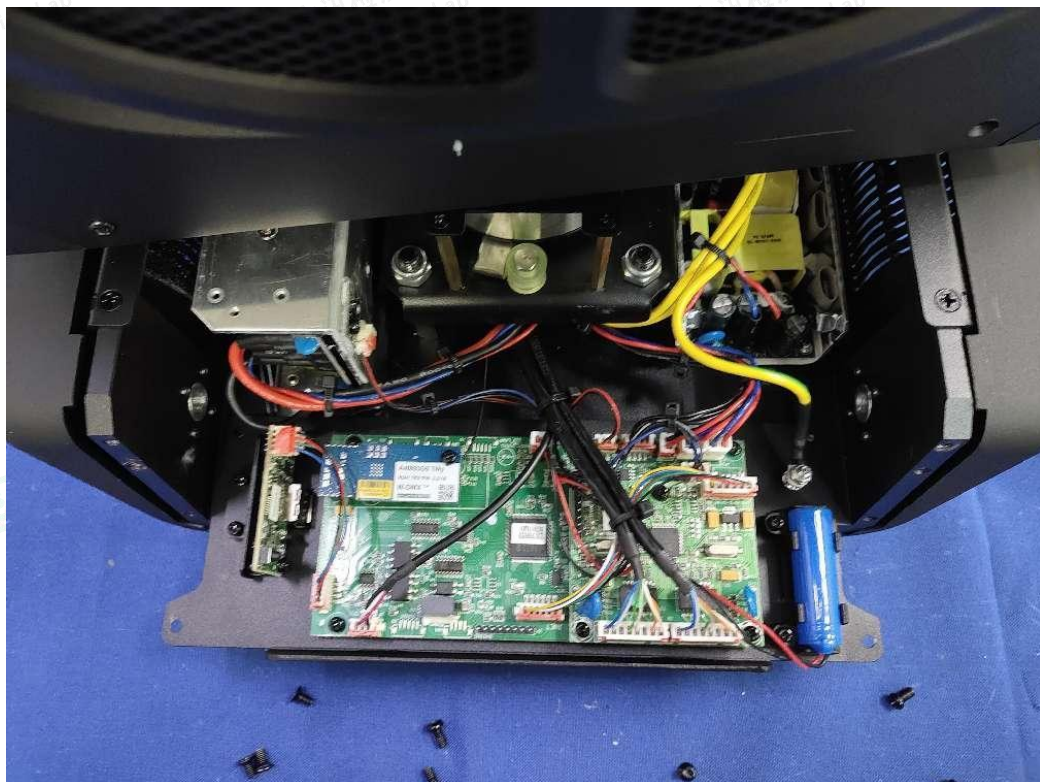


Photo.17

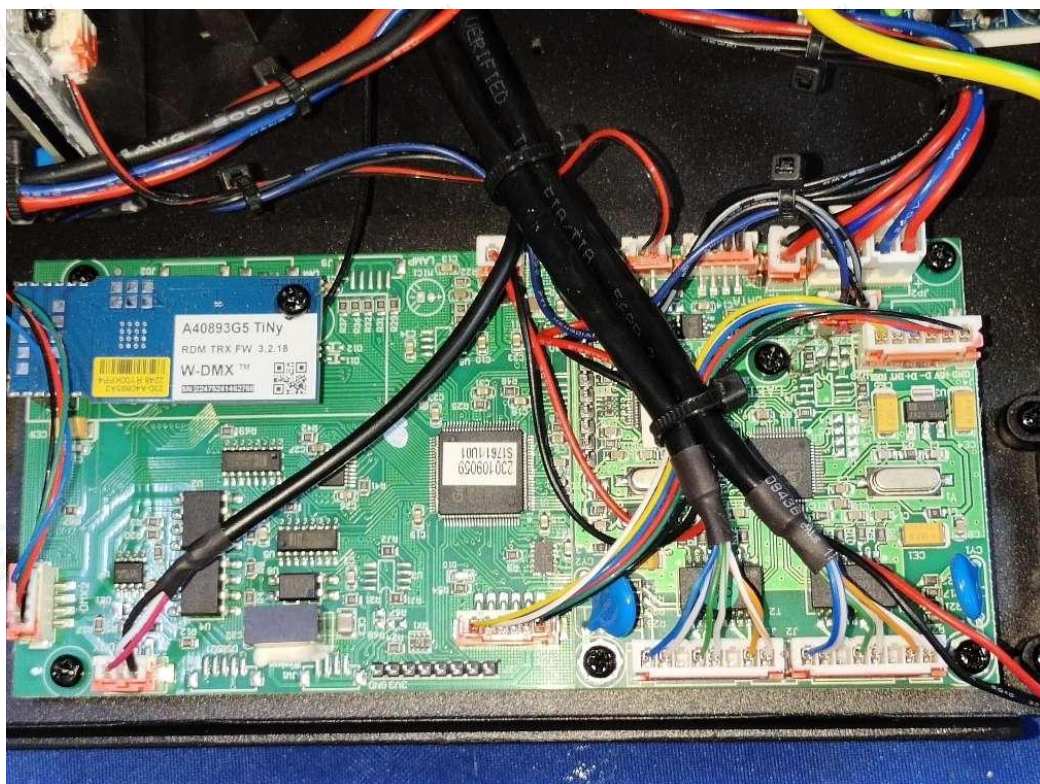


Photo.18





Photo.19



Photo.20



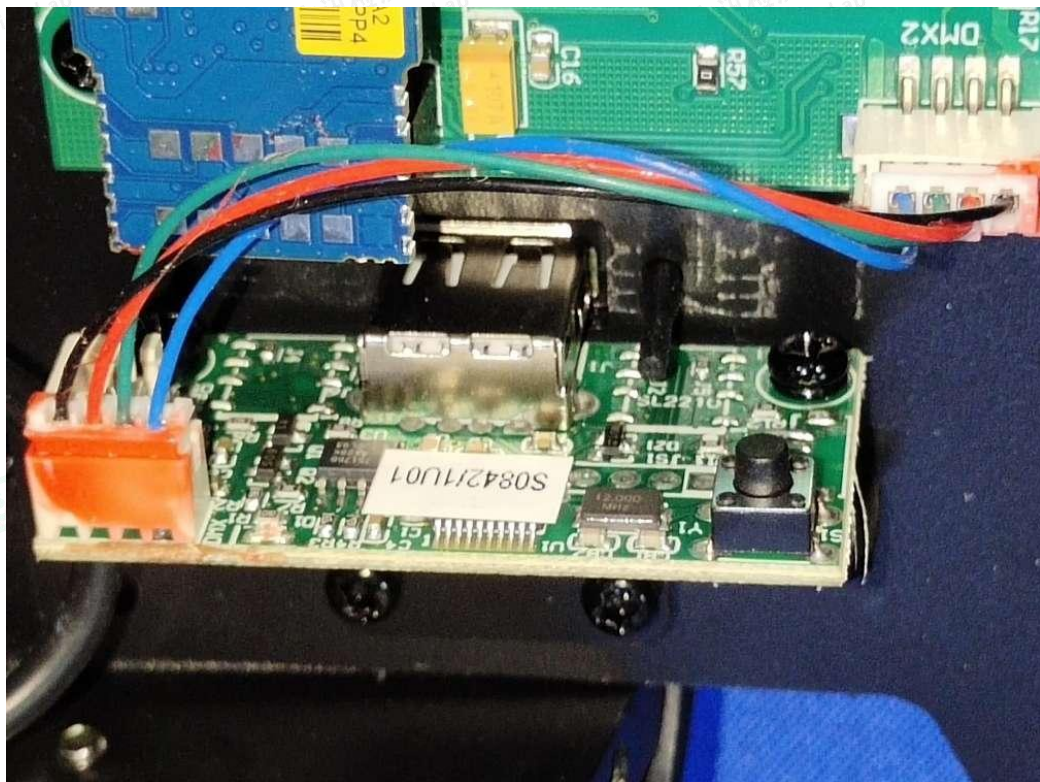


Photo.21

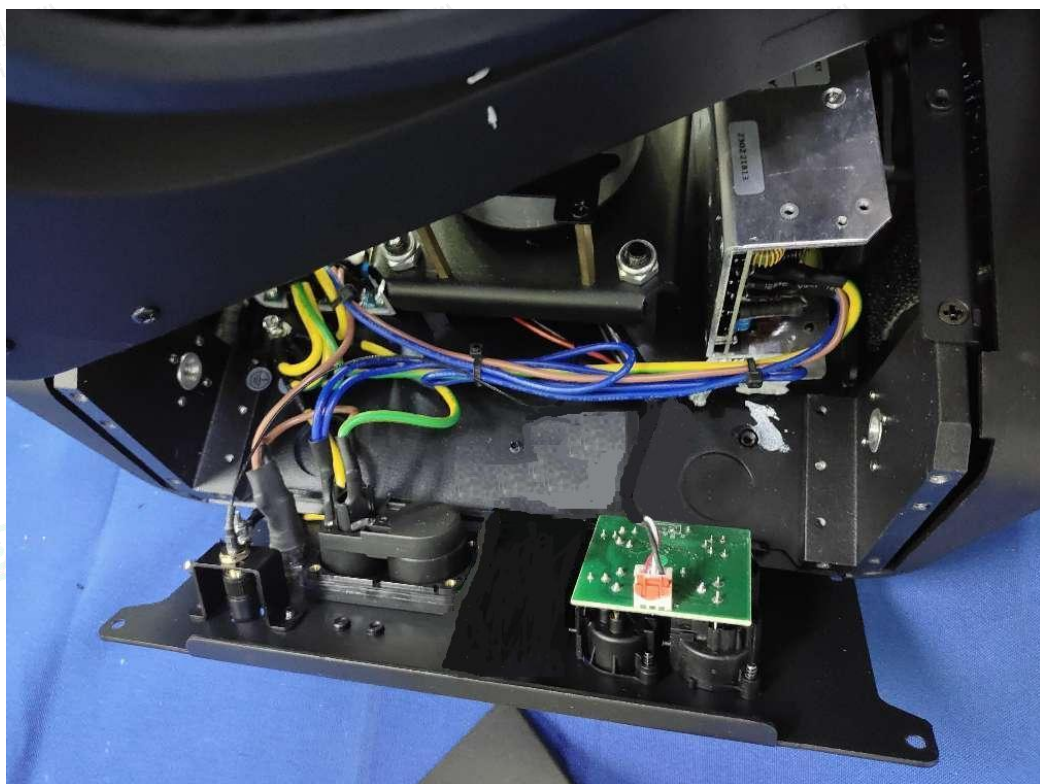


Photo.22



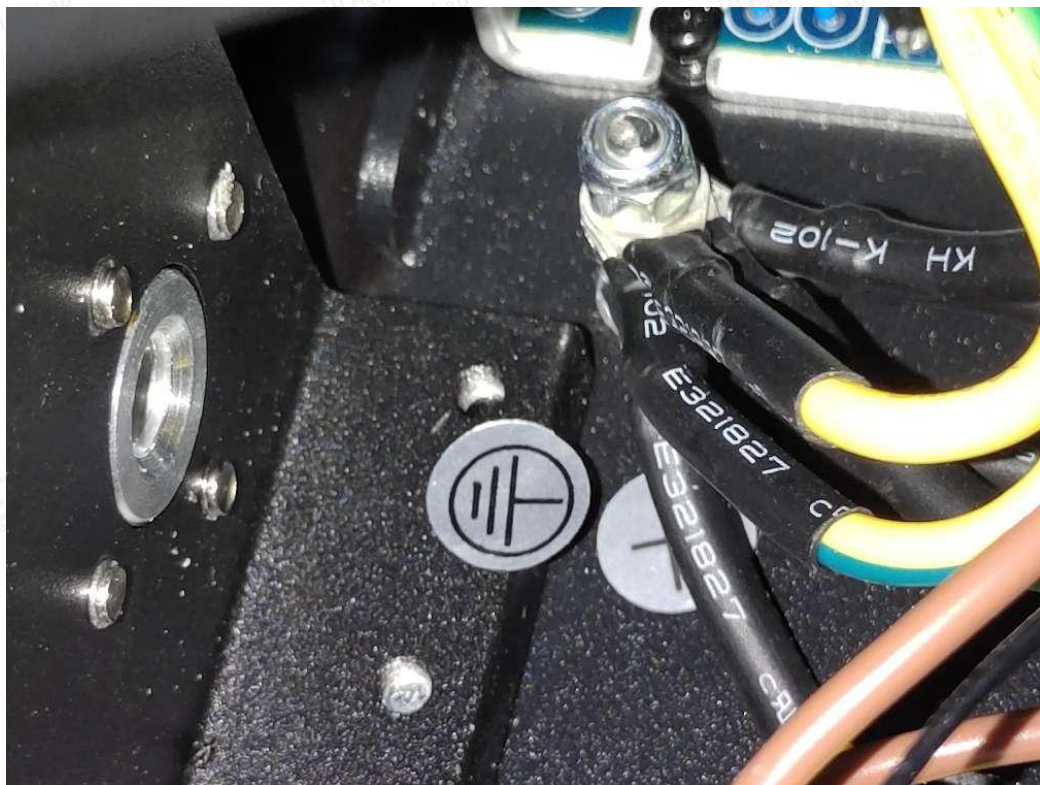


Photo.23



Photo.24



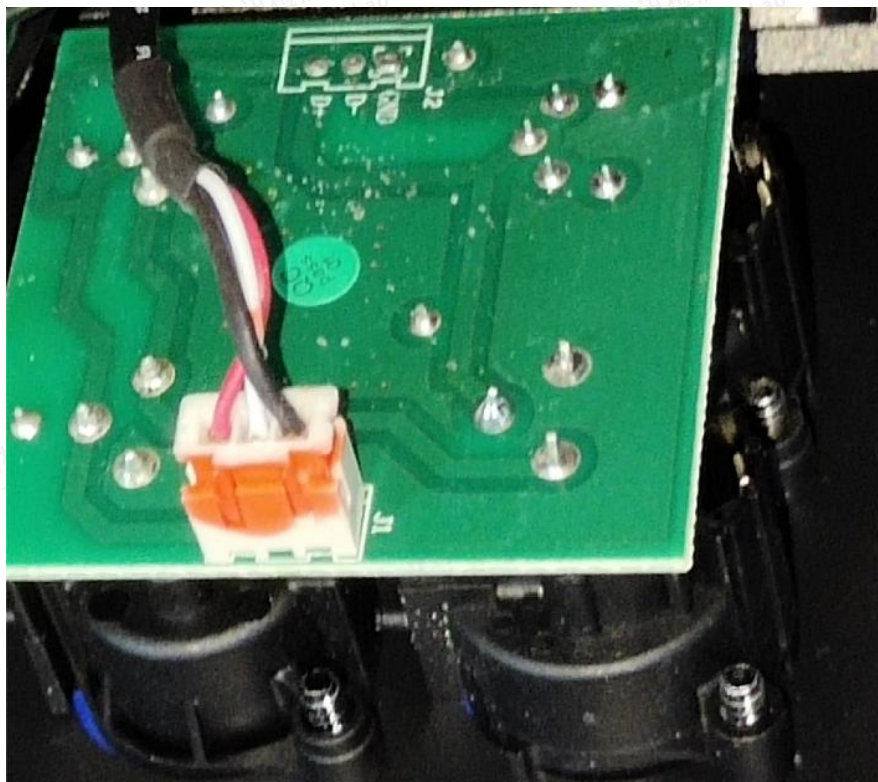


Photo.25

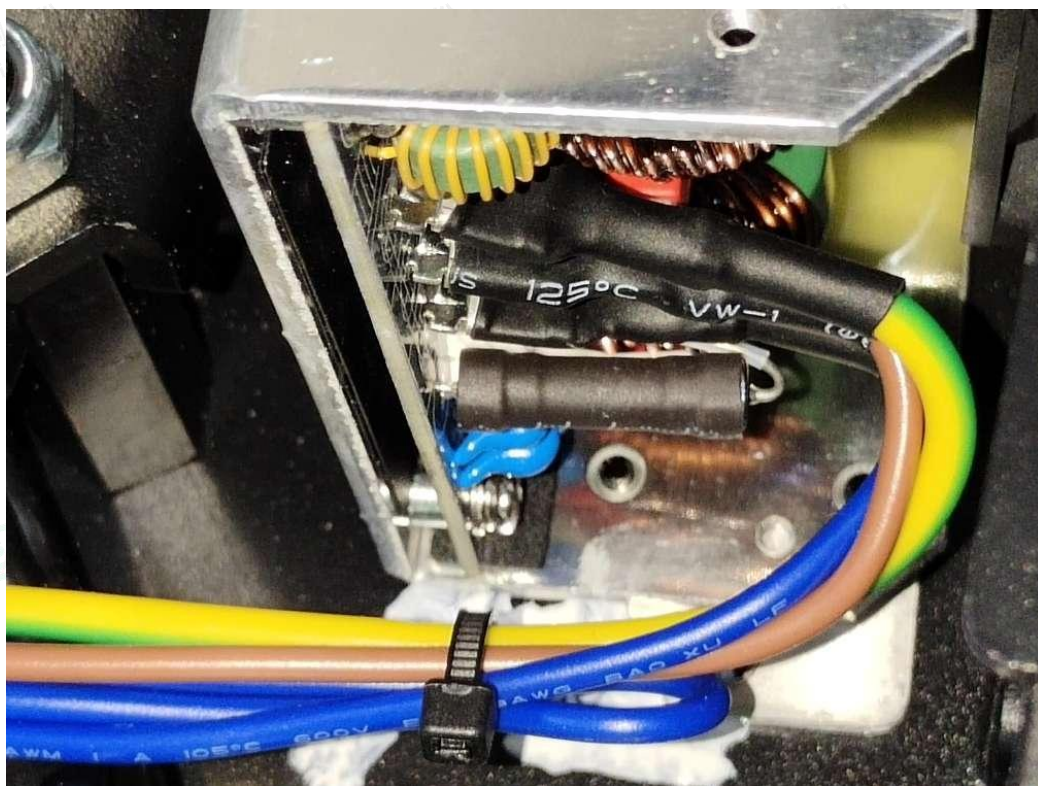


Photo.26





Photo.27

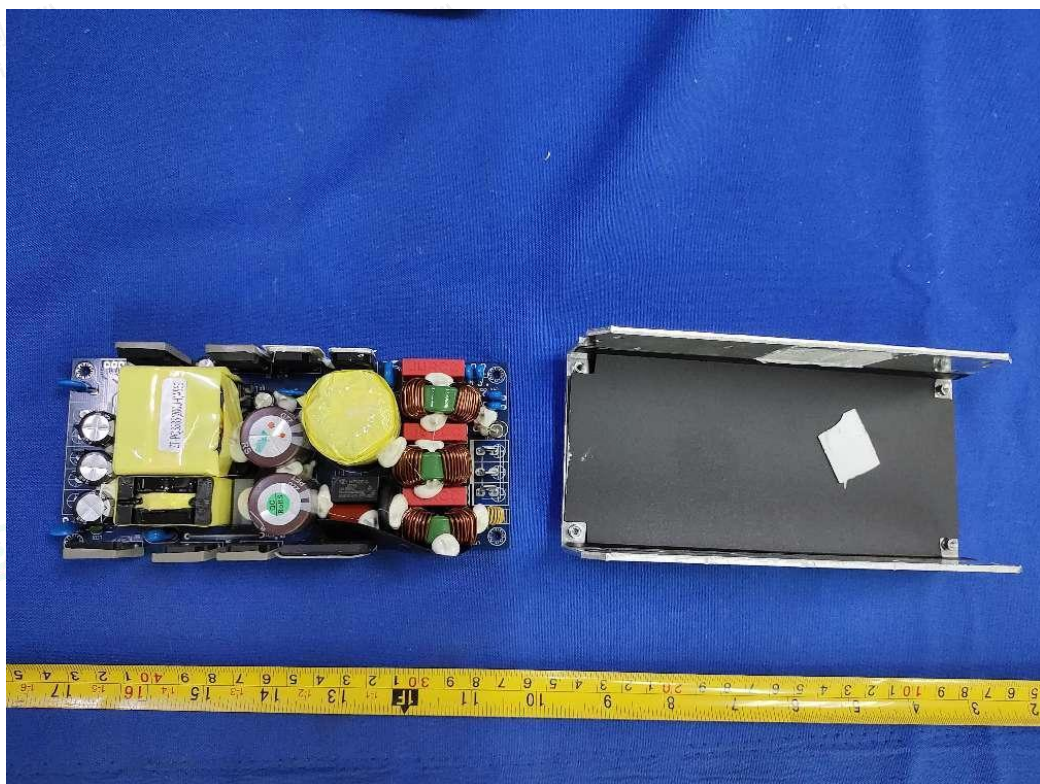


Photo.28



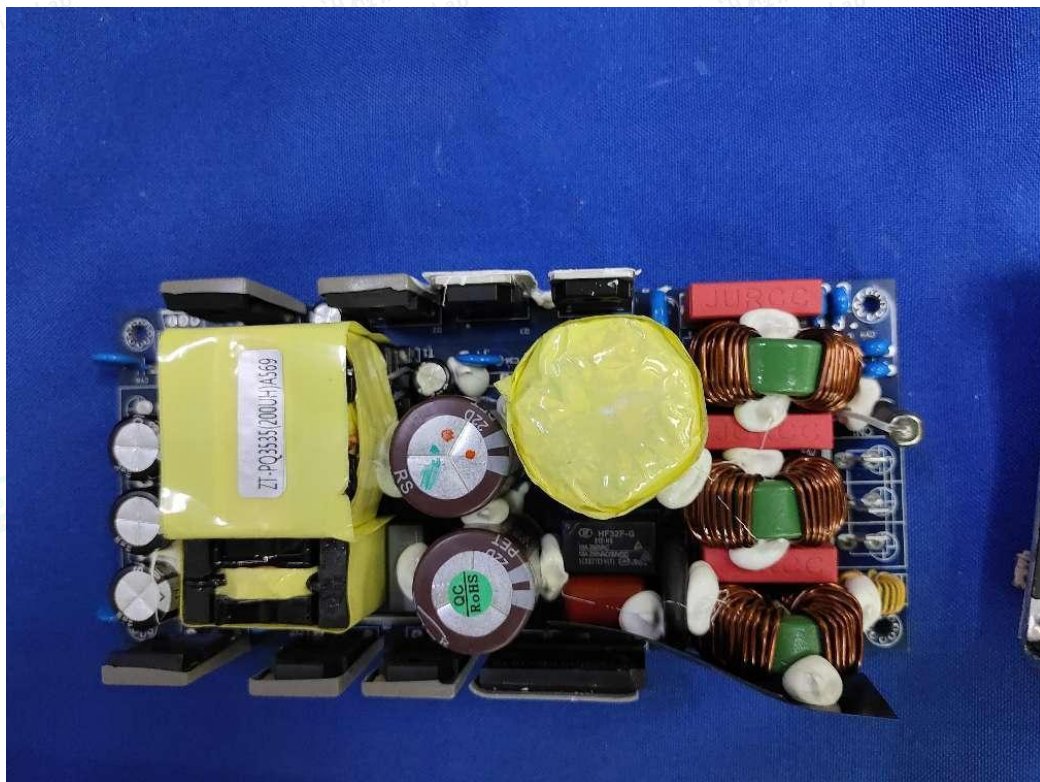


Photo.29

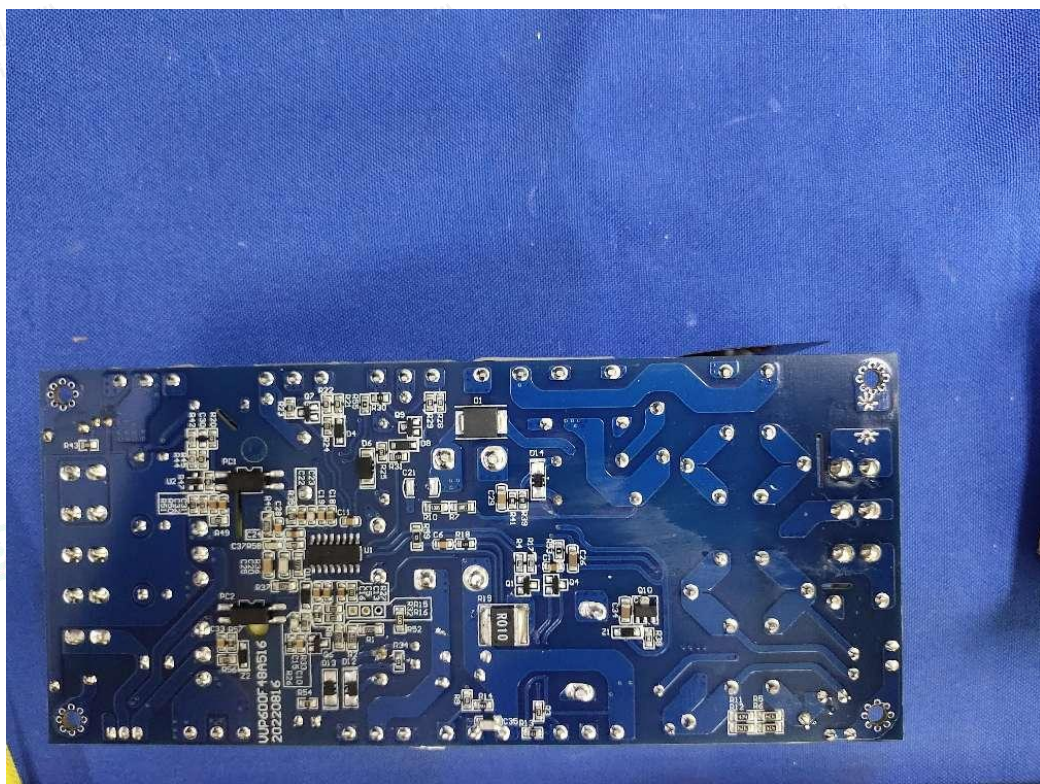


Photo.30



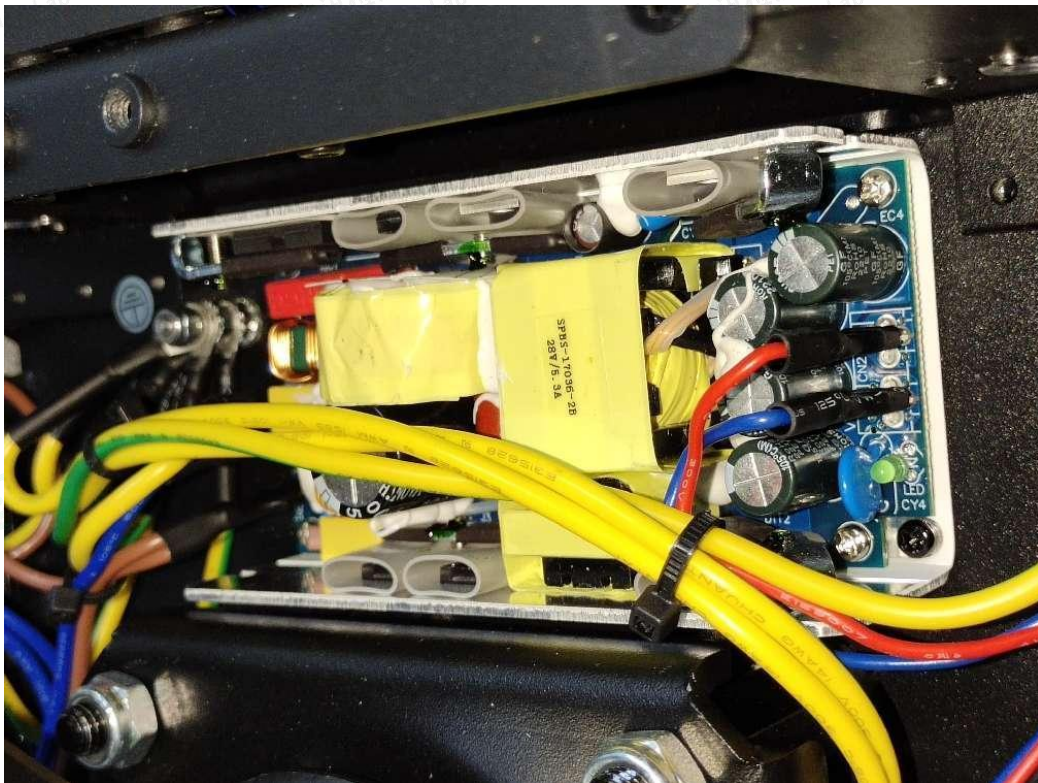


Photo.31



Photo.32

----- END -----

